
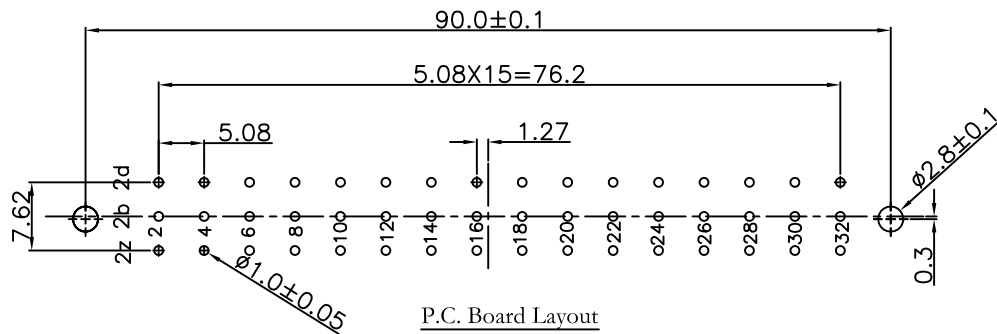



**Material:**

Housing: Thermoplastic Polyester Glass Filled UL94V-0.  
 Contacts: Copper Alloy.

**Electrical Characteristics:**

Current Rating: 5.6 AMP.  
 Dielectric Withstanding Voltage: AC 1550V For 1 minute.  
 Insulator Resistance: 1000MΩ min. at DC 500V.  
 Contact Resistance: 15mΩ max. at DC 100mA.  
 Operating Temperature: -55°C~+125°C .

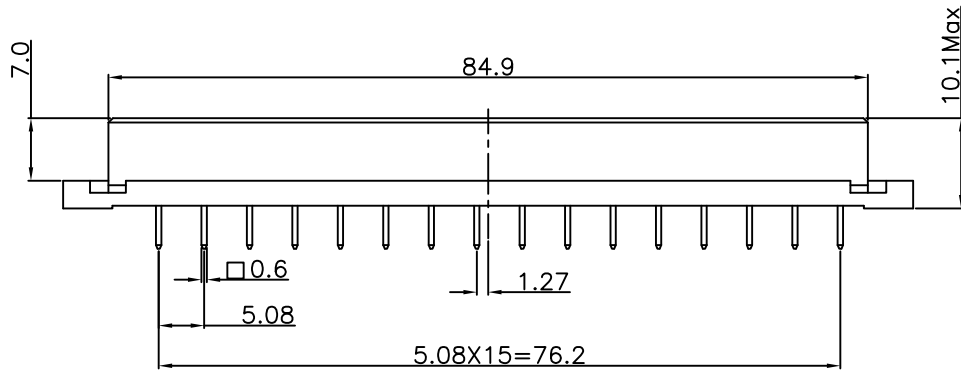


P.C. Board Layout

**RoHS Compliant**


TOLERANCES ARE

DRAWING BY CY	X. ± 0.50
CHECKED BY GENIUS	.X ± 0.25
UNIT / mm	.XX ± 0.15
SCALE 1 : 1	.XXX ±
DATE	ANG ±

SIZE A4 PPROJECTION



**ORDER INFORMATION**



DESCRIPTION:

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com