
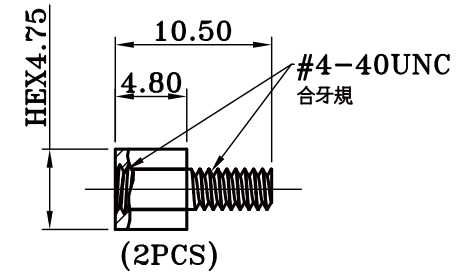


MATERIALS AND FINISH
 SHELL : STEEL MATERIAL, FRONT SHELL TIN FINISHED
 BACK SHELL TIN FINISHED
 DIMPLES ON PLUG ONLY
 INSULATOR : PBT THERMOPLASTIC, 30% GLASS FILLED,
 UL 94V-0 RATED, BLACK COLOR
 CONTACT MATERIAL : COPPER ALLOY
 CONTACT FINISH : FULL GOLD FLASH

ELECTRICAL CHARACTERISTICS
 CONTACT CURRENT RATING : 5.0 AMPS
 CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +105°C
 DEGREE OF PROTECTION: ACCORDING TO IEC529-IP67

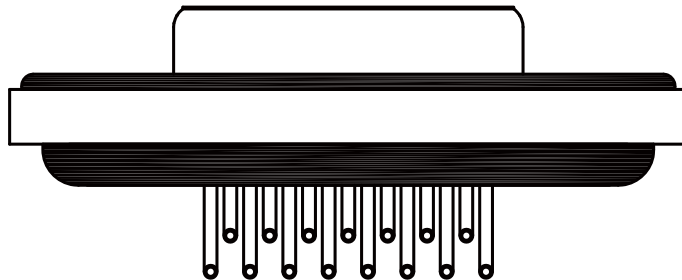

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm
 DATE


SCALE 1:1

SIZE A4

TOLERANCES ARE

X. ± 0.40
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

P PROJECTION



ORDER INFORMATION

WPDB-SRNL-15-LF

SERIES | | | LEADFREE
 | | | 15WAY
 | | | HEX SCREW
 | | | NUT
 | | | DIP 90°
 | | | FEMALE

DESCRIPTION: