


A	COLOR	B
1	RED	1
2	GRAY	2
3	GRAY	3
.	.	.
.	.	.
.	.	.
.	.	.
24	GRAY	24
25	GRAY	25
26	GRAY	26

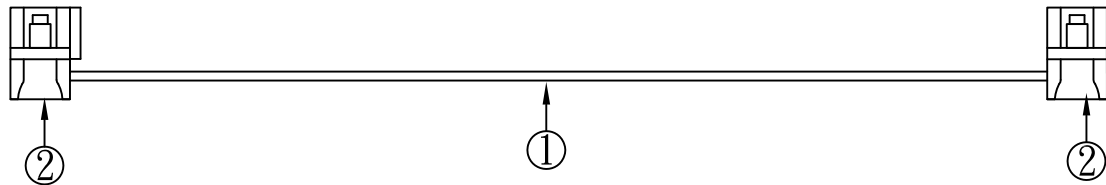

NOTES:

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 5Ω Max
3. INSULATION RESISTANCE: 20MΩ Min

NO.	ITEM.	DESCRIPTION	Q'TY
1	WIRE:	UL 2651 #28 26P FLAT CABLE PH:1.27	1PCS
2	IDC:	26P W/NOSE W/O SR PH:2.54 BLACK (2 Piece type)	2SET
3			
4			
5			
6			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

F2X2-2626-F4C6-LF
SERIES | LEADFREE
46mm
FEMALE TO FEMALE
26 TO 26 PIN

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: CABLE ASS'Y