


SPECIFICATIONS

- * Current Rating : 3 Amps
- * Insulator resistance: 5000 Megohms min.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40°-+105°C
- * Max Processing Temp: 230° for 30~60 seconds
(260° for 10 seconds)
- * Contact Material: Phosphor bronze
- * Housing: L.C.P (UL 94 V-0)
- * Plating: gold flash

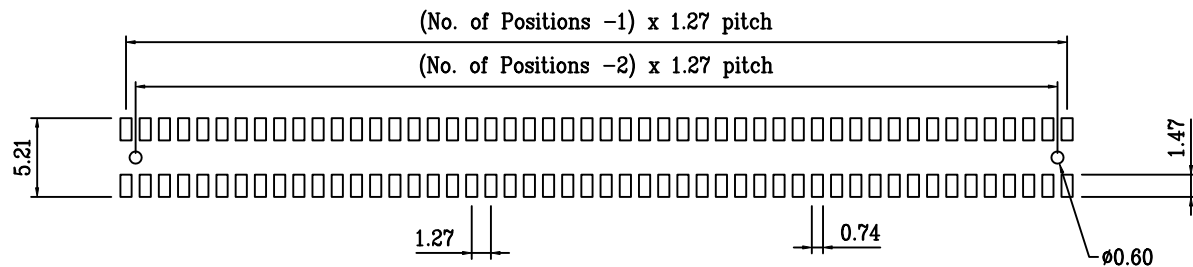

Recommended P.C.B. Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±


PJECTION




ORDER INFORMATION

YA-V45PCR-2Xxx-LF
SERIES LEADFREE
2X02:04WAY
2X50:100WAY
180°SMT REEL
HIGH 4.5mm CAP POST

DESCRIPTION: Dual Row 1.27x1.27 SMD Female

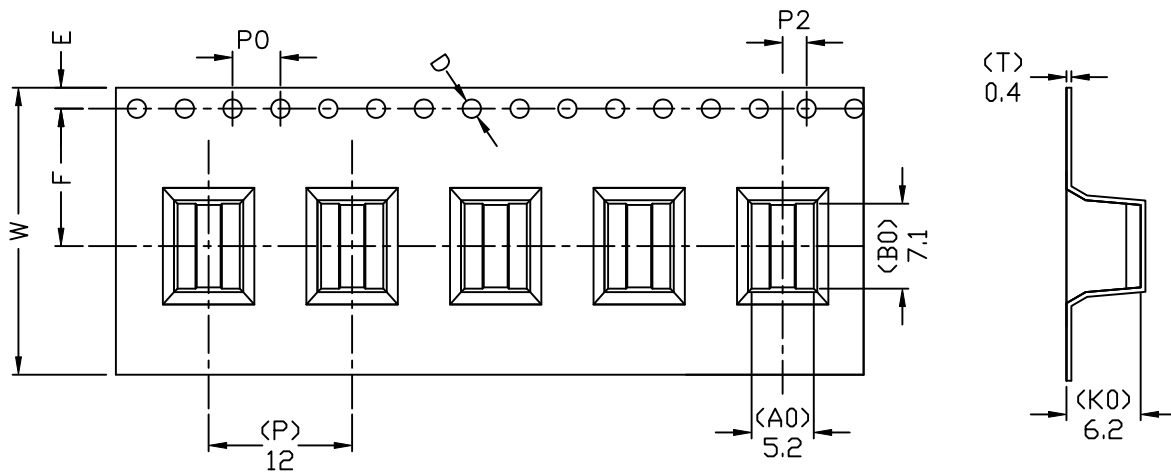

1. sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$.
2. Carrier camber not to exceed 1mm in 100mm.
3. A_0 and B_0 measured on a plane 0.3mm above the bottom of the pocket.
4. K_0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
5. All dimensions meet EIA-481-C requirements.
6. Material: Black Anti-static Polystyrene.
7. Thickness: $0.4 \pm 0.05\text{ mm}$.
8. Packing length per 22" reel : 34 Meters.
9. Component loaded per 13" reel : 850 pcs. (Core 4")



2X05 REEL

PART NO: YA-V45PCR-2X05-LF

ITEM	W	A_0	B_0	K_0	K_1	P	F	E	D	D_1	P_0	P_2
DIM	24.0 ^{+0.30} _{-0.30}	5.20 ^{+0.20} _{-0.10}	7.10 ^{+0.20} _{-0.10}	6.20 ^{+0.20} _{-0.10}	0.00 ^{+0.00} _{-0.00}	12.0 ^{+0.10} _{-0.10}	11.50 ^{+0.15} _{-0.15}	1.75 ^{+0.10} _{-0.10}	1.50 ^{+0.10} _{-0.00}	0.00 ^{+0.00} _{-0.00}	4.00 ^{+0.10} _{-0.10}	2.00 ^{+0.10} _{-0.10}

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. \pm

CHECKED BY GENIUS

.X \pm

UNIT / mm

SCALE 1 : 1

.XX \pm


DATE

.XXX \pm

ANG \pm

SIZE A4

P PROJECTION



ORDER INFORMATION

YA-V45PCR-2Xxx-LF
SERIES | LEADFREE
2X02:04WAY
2X50:100WAY
180°SMT REEL
HIGH 4.5mm CAP POST

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 2X05 REEL