





Part No.	Dim.	Amount of Pins	Dim.A	Dim.B	Dim.C	Dim.D
BCT20-SR039Z-03		3	15.00	8.65	4.00	10.35
BCT20-SR039Z-04		4	17.00	10.65	6.00	12.35
BCT20-SR039Z-05		5	19.00	12.65	8.00	14.35
BCT20-SR039Z-06		6	21.00	14.65	10.00	16.35
BCT20-SR039Z-07		7	23.00	16.65	12.00	18.35
BCT20-SR039Z-08		8	25.00	18.65	14.00	20.35

Notes:

- Material :
Housing : Thermoplastic UL 94V-0 ,Black
Terminal : Copper Alloy
Forklock : Copper Alloy
- Finish :
Terminal : Selected Gold on Contact Area, G/F on Solder Tails, Both over 50u" Min. Ni Under-plated Overall.
Forklock : 1u" Min. Gold over 50u" Min. Ni Under-plated Overall.
- 3 : 5u" Min. Gold on Contact Area

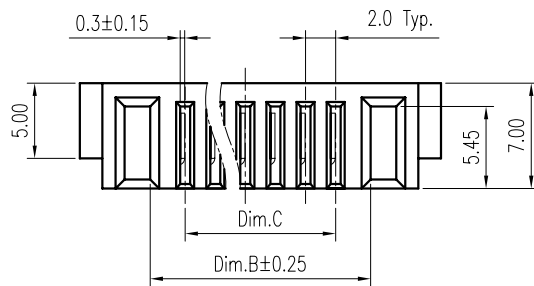

BCT20-SR39Z-xx
With Forklock

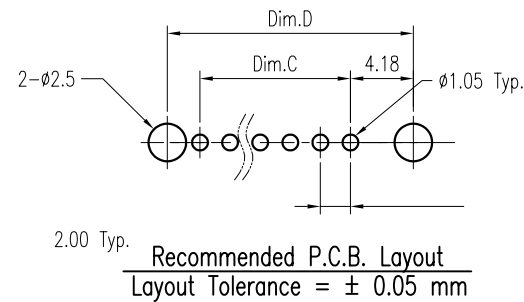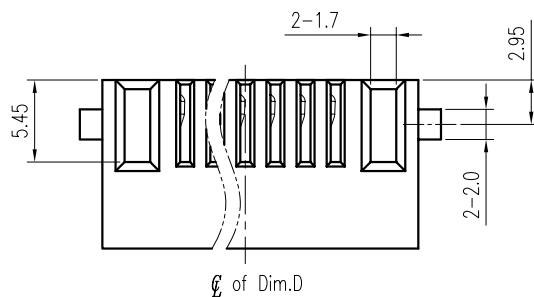

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

BCT20-SR039Z-xx-LF

SERIES | | | | LEADFREE
03-08 WAY
CLIP
HIGH 3.9mm
DIP 90°
MALE

DESCRIPTION: 2.0mm Pitch Battery Conn. Female Type

煜倫股份有限公司

www.morethanall.com