


### SPECIFICATIONS

- \* Current Rating : 1 Amps
- \* Insulator resistance: 5000 Megohms min.
- \* Dielectric withstanding: AC 500 V
- \* Operating Temperature: -40°-+105°C
- \* Max Processing Temp: 230° for 30~60 seconds  
(260° for 10 seconds)
- \* Contact Material: Phosphor bronze
- \* Housing: L.C.P (UL 94 V-0)

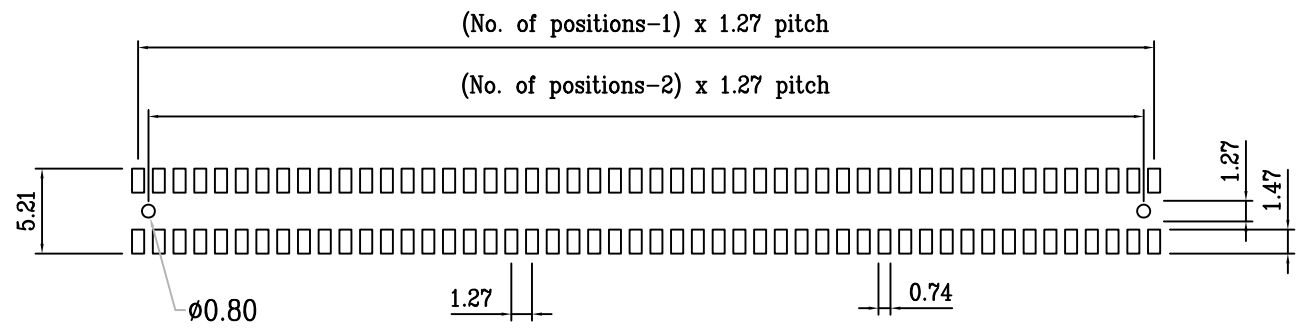


Recommended P.C.B. Layout

**RoHS Compliant**


TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
煜倫股份有限公司  
www.morethanall.com

DRAWING BY CY		X. ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PJECTION	



**ORDER INFORMATION**

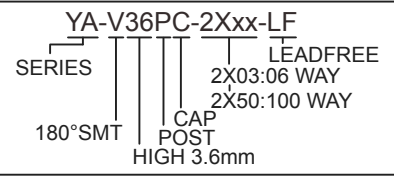

DESCRIPTION: Dual Row 1.27x1.27 SMD (H=3.6mm)