

1. MATERIAL :

- 1-1. HOUSING : PA66 ; COLOR : BLACK.
- 1-2. CONTACT : BRASS.
- 1-3. NUT : BRASS.
- 1-4. SETSCREW : SPCC STEEL.
- 1-5. "T" HOLDER : SPCC STEEL.
- 1-6. STRAIN BOOT : TPR ; COLOR : BLACK.
- 1-7. SHELL : BRASS.
- 1-8. SPRING : STAINLESS STEEL.

2. FINISH :


- 2-1. CONTACT : SILVER PLATED OVER ALL
- 2-2. NUT : NICKEL PLATED OVER ALL
- 2-3. SETSCREW : NICKEL PLATED OVER ALL
- 2-4. "T" HOLDER : NICKEL PLATED OVER ALL
- 2-5. SHELL : NICKEL PLATED OVER ALL

3. ELECTRICAL SPECIFICATION :

- 3-1. RATED CURRENT : 10A
- 3-2. RATED VOLTAGE : 125V

4. ENVIRONMENTAL :

- 4-1. OPERATION TEMPERATURE : -40 °C~85°C

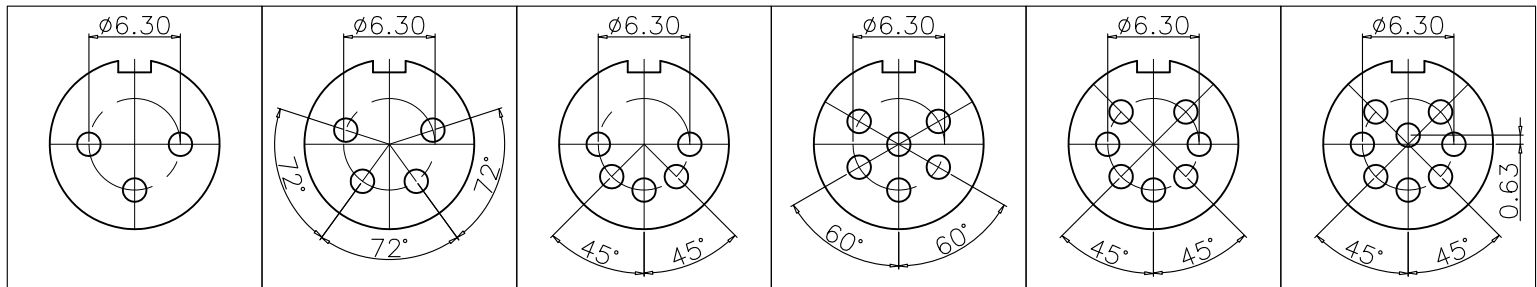

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.25  
.XX ± 0.10  
.XXX ± 0.05  
ANG ± 1°

P PROJECTION



ORDER INFORMATION

DAMS-PA-xx-LF

SERIES | LEADFREE  
| 03-08 WAY  
ASSEMBLY  
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 8P 270° DIN CABLE PLUG