
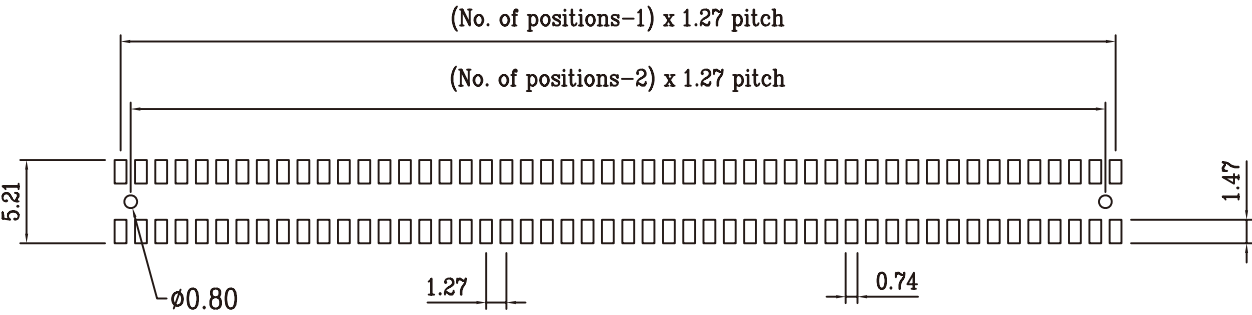

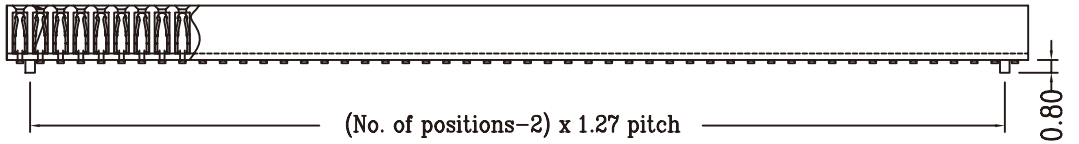


SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40°~+105°C
- * Max Processing Temp: 230° for 30~60 seconds
(260° for 10 seconds)
- * Contact Material: Phosphor bronze
- * Housing: L.C.P (UL 94 V-0)

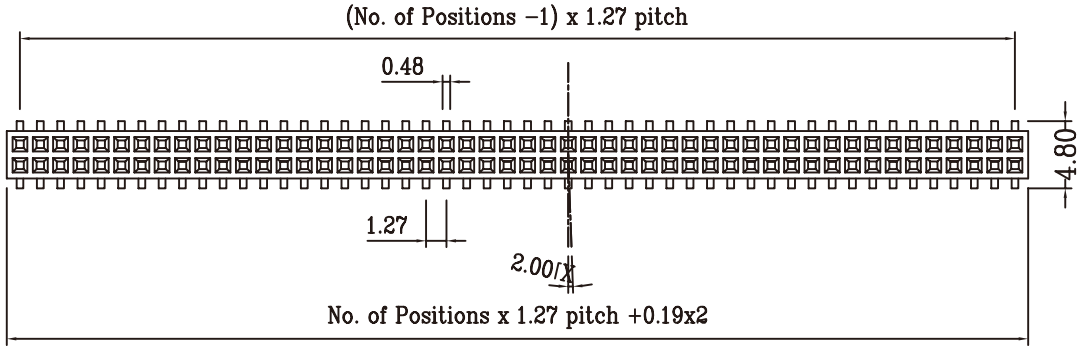

Recommended P.C.B. Layout

RoHS Compliant


TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

| | | |
|-------------------|-----------|---|
| DRAWING BY CY | | X, ± .X ± 0.15 .XX ± 0.10 .XXX ± 0.05 ANG ± |
| CHECKED BY GENIUS | | |
| UNIT/ mm | SCALE 1:1 | |
| DATE | | |
| SIZE A4 | PJECTION | |



ORDER INFORMATION



DESCRIPTION: Dual Row 1.27x1.27 SMD (H=3.6mm)