

SPECIFICATIONS

Electrical

Current Rating: 2A AC, DC

Voltage Rating: 100V AC/ max.

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 1000MΩ/ min.


Withstand Voltage: 800V AC/ min.

Contact Resistance: 20MΩ/ max.

Material

Terminal Material: Tin/ Gold Plated

Material: Nylon 66, UL94V-0

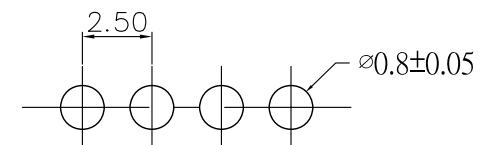

RECOMMENDED P.C.BOARD HOLE DIMM.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±


DATE

.XXX±

ANG±

SIZE A4

PJECTION



ORDER INFORMATION

EI-R-04-LF
SERIES | LEADFREE
04WAY
DIP 90°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: