
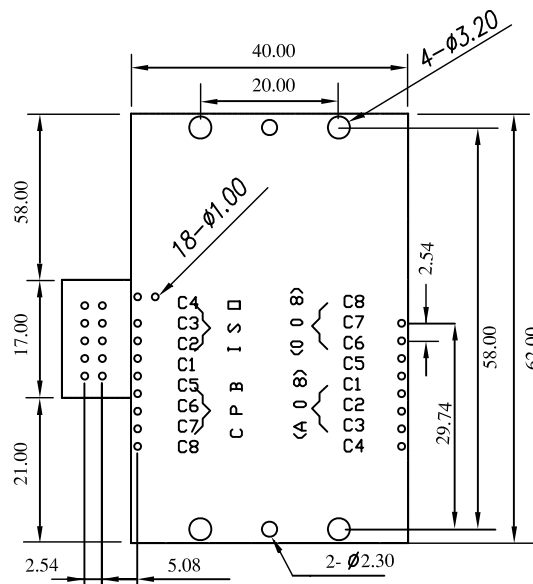
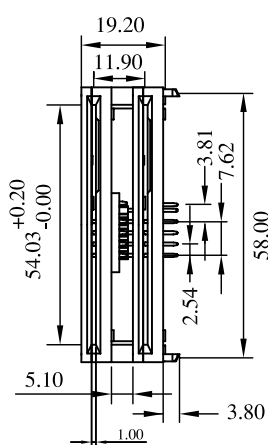


# Series Smart Card Connector (V3 Double Type)

## SPECIFICATION:

- Contact Material: Phosphor Bronze ( SPOON )
- Insulator Material: P.B.T, UL 94V-0
- Terminal Plating: SnPb on nickel
- Switch Contact Plating: Gold(30micro Inch)On Nickel
- Current rating: 1A DC MAX
- Insulation resistance: 1000 Megaohms MIN
- Contact resistance: 100 milliohms MAX
- Withstand voltage: AC 1000V RMS (1MIN)
- Rated voltage: 50V DC MAX
- Temperature Range: -40°C~ +60°C
- Card Insertion Force: 511g MAX
- Card Withdrawal Force: 102g MIN
- Insertion Cycles: 100000 cycles MIN

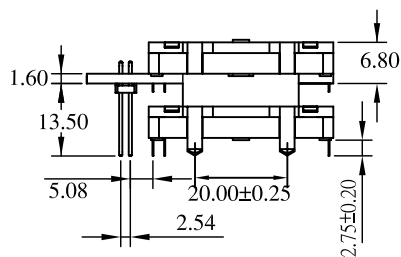

Through Hole Mounting

## Note:

- Card Insertion Specification :  
A.Card Insertion Depth 35.3mm  
B.Card Thickness Depth 0.7 ~ 0.8mm

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±  
X, ±  
.XX ±  
.XXX ±  
ANG ±



ORDER INFORMATION

SCF-Rx-xx-LF  
SERIES | LEADFREE  
08.16 WAY  
A:CLOSED/SWITCH  
B:OPEN/SWITCH  
DIP 90°

DESCRIPTION: Series Smart Card Connector (V3 Double Type)