







PR-P-02





PR-P-03





PR-P-04





PR-P-05





PR-P-06





PR-P-07

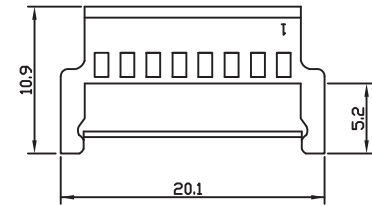


PR-P-08

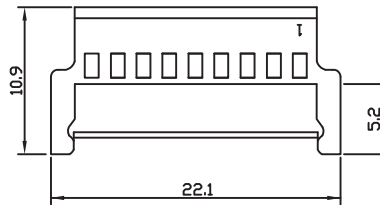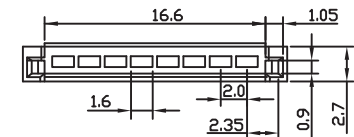

PR-P-09

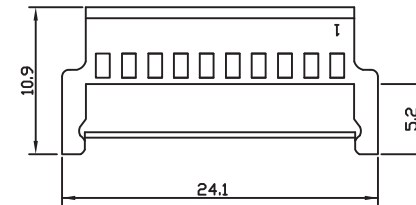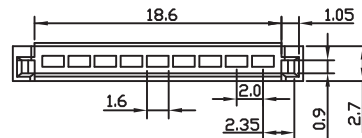

PR-P-10

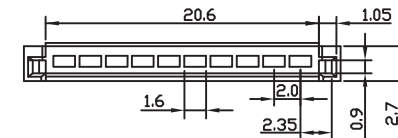

**SPECIFICATIONS**

Circuit: 2~10  
 Voltage rating: 125V AC, DC  
 Withstanding voltage: 500V AC/minute  
 Insulation resistance: 1000M OHM min  
 Temperature range: -25°C ~ +85°C  
 Material: UL94V-0 nylon 66

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1


DATE

SIZE A4


TOLERANCES ARE

X, ±  
 X, ±  
 .XX ±  
 .XXX ±  
 ANG ±

P PROJECTION



**ORDER INFORMATION**

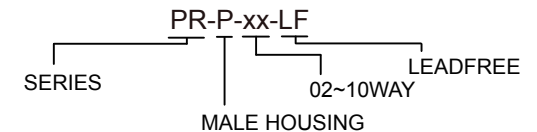

DESCRIPTION: