

**Features:**






- 2 ~ 12 circuits available
- Material: UL 94V-0 nylon

**Specification:**

- Current rating: 3A
- Voltage rating: 250V
- Insulation resistance: 500MΩ Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

2P

3 ~ 12P

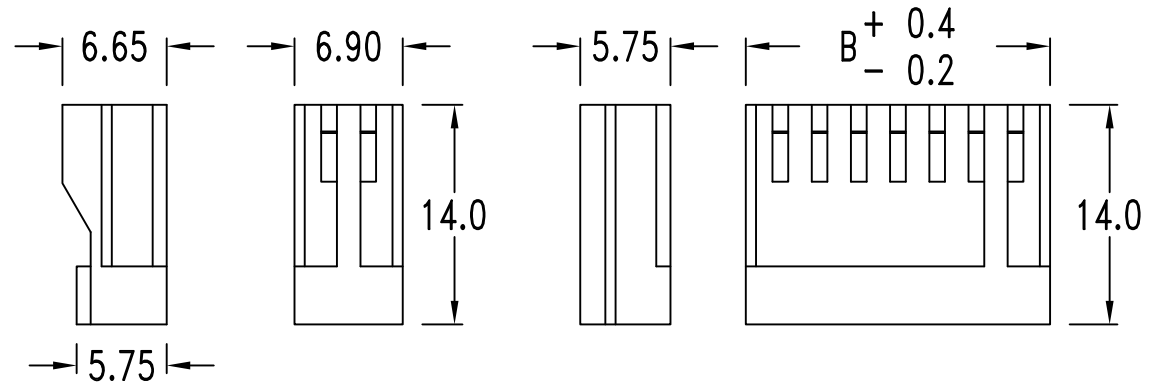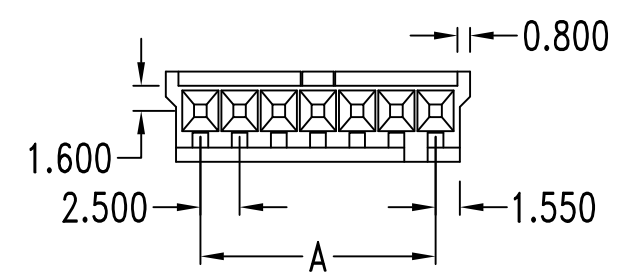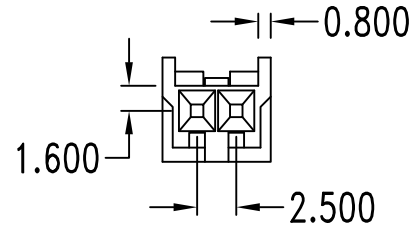


**Dimensional Information ( mm )**

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	2.5±0.08	6.9	5	10.0±0.10	14.4	8	17.5±0.15	21.9	11	25.0±0.15	29.4
3	5.0±0.10	9.4	6	12.5±0.10	16.9	9	20.0±0.15	24.4	12	27.5±0.20	31.9
4	7.5±0.10	11.9	7	15.0±0.15	19.4	10	22.5±0.15	26.9			


**RoHS Compliant**

TOLERANCES ARE

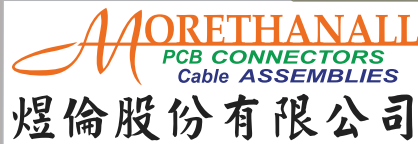

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1 : 1  
 DATE

X, ±  
 .X ± 0.40  
 .XX ± 0.25  
 .XXX ± 0.08  
 ANG ±



**ORDER INFORMATION**

EI-H-xx-LF  
 SERIES | LEADFREE  
 02-12 WAY  
 HOUSING

www.morethanall.com

SIZE A4 PPROJECTION

DESCRIPTION: