

Material & Finish

SHELL:

ABS, Black

PIN CONTACT:

Phosphor Bronze
Gold Flash plated

INSULATOR:

PBT & Glass-fibre reinforced
UL-94-V0, Black

CURRENT RATING:

5 Amp

DIELECTRIC STRENGTH:


1000V for one minute

INSULATOR RESISTANCE:

1000MΩ Min. (at 500V DC)

TEMPERATURE:

-55°C to +105°C

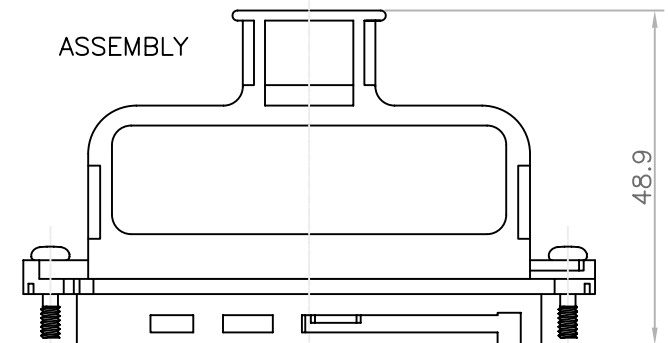

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20


DATE

.XXX ±

ANG ± 3°

SIZE A4

PPOJECTION



ORDER INFORMATION

CTI-PK-50-LF

SERIES | LEADFREE
| 50 WAY
| BLACK
| MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: CENTRONIC I. D. C. TYPE MALE 50PIN STRAIGHT COVER ALL PLASTIC