
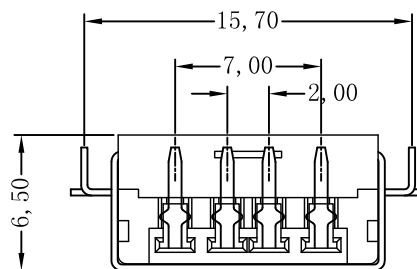


Recommend P.C.B Layout
T=1.2mm

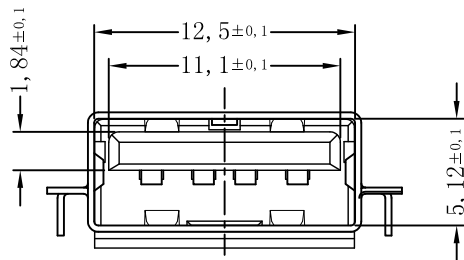

SPECIFICATIONS:

Contact current Rating:1Amperes.
DIELECTRIC Withstanding Voltage:AC 750V
at sea level
Insulation resistance:1000Megohms Minimum.
Contact Resistance:30mΩ Max
operating Temperature:-55° to+85°

MECHANICAL CHARACTERISTICS:

Mating Force:3.5Kg.Maximum
Unmating Force:1kg.Mlimum.

| | | | | | |
|----|----|----|--------|--|--------------|
| 3 | 胶蕊 | 1 | LCP | | COLOR: BLACK |
| 2 | 端子 | 4 | C5191H | "NICKEL PLATED OVER ALL 300" TIN/GOLD PLATING | GOLD/PLATING |
| 1 | 外壳 | 1 | 黄铜 | Ni PLATING | |
| 序号 | 名称 | 数量 | 材料 | 表面 | 备注 |

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.20

UNIT / mm

SCALE 1 : 1


.XXX ±

DATE

ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

USB-SRF39EM2FXBK-4A-LF
SERIES | LEADFREE
FEMALE | 4 PIN A TYPE
DIP 90° | BLACK
NON FLANGE
EAR+METAL FOOT
OFFSET 3.9mm

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: USB AF 90度破板正向插板無邊 H3.9