

SPECIFICATIONS

BODY MATERIAL: THERMOPLASTIC (UL 94V-0), GREEN

TERMINALS: TIN PLATED BRASS


LEVER: THERMOPLASTIC (UL 94V-0). ORANGE

WIRE RANGE AWG: 18-22 STR.

RATING: 10 AMPERES, 300 VAC

INSULATION WITHSTANDS VOLTAGE AC 2000V/MIN

INSULATION RESISTANCE 500M Ω OR MORE AT DC 500V

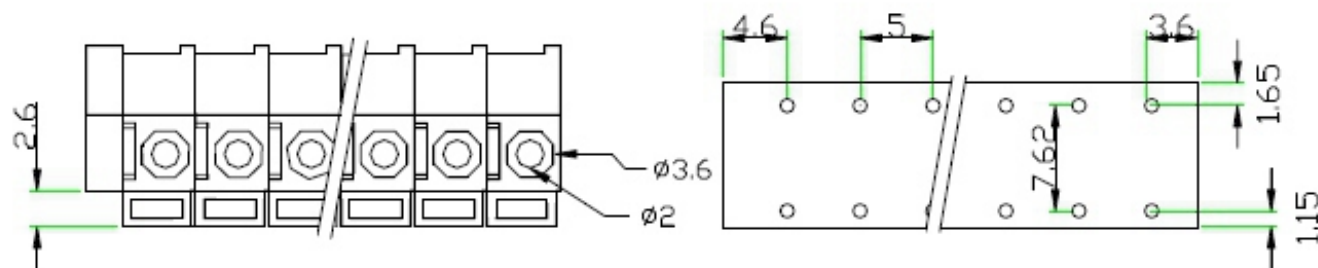

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
A	12.6	17.6	22.6	27.6	32.6	37.6	42.6	47.6	52.6	57.6	62.6	67.6	72.6	77.6	
B	5	10	15	20	25	30	35	40	45	50	55	60	65	70	
POLE	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
A	82.6	87.6	92.6	97.6	102.6	107.6	112.6	117.6	122.6	127.6	132.6	137.6	142.6	147.6	152.6
B	75	80	85	90	95	100	105	110	115	120	125	130	135	140	145

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, \pm

CHECKED BY GENIUS

X, \pm

UNIT / mm

SCALE 1 : 1

.XX \pm


.XXX \pm

ANG \pm

DATE

SIZE A4

P PROJECTION



ORDER INFORMATION

TBX050-D14B-xx-LF

SERIES

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

LEADFREE
02~30 WAY
TWO LEG
HIGH 14.0mm
DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: