

- Material:
- ④ Item ④ Male contact pin: Copper C1100 Tin plated
  - ⑤ Item ⑤ Terminalhousing: Thermoplastic (UL94V-0)
  - ⑥ Item ⑥ With flange nut: Brass M2.5
- Electrical: cULus /VDE
- ⑩ Voltage rating: 300V/300V
  - Current rating: 10A/10.5A
  - Withstanding Voltage: 1.6 KV/2.5KV
  - ⑤ Operating temperature: -40°C to +115°C
  - ③ Soldering temperature: 250°C±10°C/5 Sec
  - ⑧ Safety Approval:
  - Critical dimension: ▽

N= number of poles

Dim A	$(N-1) \times 3.81 + 14.2$
Dim B	$(N-1) \times 3.81$
Dim C	$(N-1) \times 3.81$
Dim D	$(N-1) \times 3.81 + 9.0$

2p-6p	±0.15
7p-12p	±0.20
13p-16p	±0.25
17p-24p	±0.30


RECOMMENDED PCB LAYOUT

RoHS Compliant


TOLERANCES ARE



DRAWING BY CY		X. ± 0.50
CHECKED BY GENIUS		.X ± 0.30
UNIT / mm	SCALE 1 : 1	.XXX ±
DATE		ANG ± 1°
SIZE A4	PJECTION	



ORDER INFORMATION

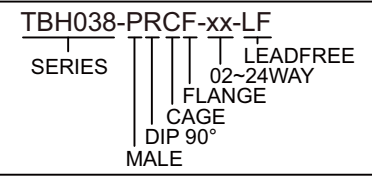

DESCRIPTION: 3.81mm 90° W/Flange Series 2p-24p

煜倫股份有限公司

www.morethanall.com