




NOTES:  
 1. MATERIAL: PA66 GLASS-FILLED 94V-0  
 2. CONTACT PIN: BRASS  
 WITH MATTE-TIN-PLATED

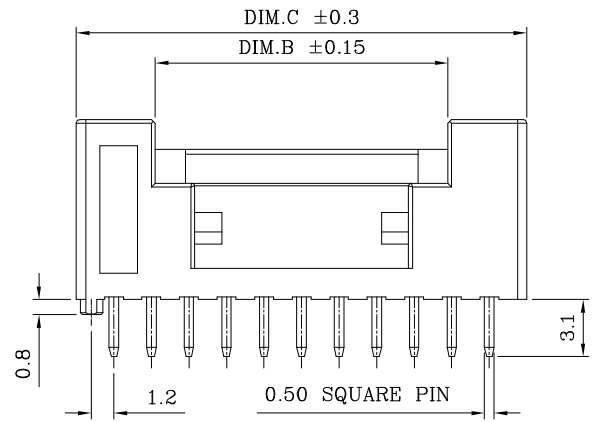


DIMENSIONS:			
CIRCUITS	DIM.A	DIM.B	DIM.C
8	6.0	---	10.0
10	8.0	---	12.0
12	10.0	7.2	14.0
14	12.0	7.2	16.0
16	14.0	9.2	18.0
18	16.0	9.2	20.0
20	18.0	15.2	22.0
22	20.0	15.6	24.0
24	22.0	15.6	26.0
26	24.0	15.6	28.0
28	26.0	15.6	30.0
30	28.0	20.0	32.0
32	30.0	20.0	34.0
34	32.0	20.0	36.0

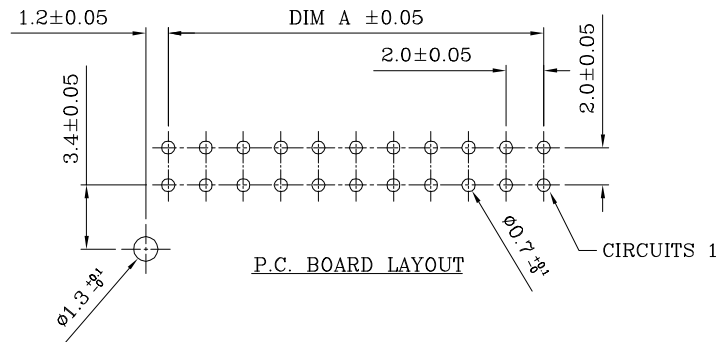

**RoHS Compliant**

TOLERANCES ARE  
 X. ±  
 .X ± 0.25  
 .XX ± 0.12  
 .XXX ± 0.08  
 ANG ± 3°



**ORDER INFORMATION**

PUD-DP-xx-LF  
 SERIES | LEADFREE  
 08-34WAY  
 POST  
 DIP 180°

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
 煜倫股份有限公司  
 www.morethanall.com

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1 : 1  
 DATE  
 SIZE A4 PPROJECTION

DESCRIPTION: 2.00mm PITCH (DUAL-ROW) STRAIGHT PIN HEADER