

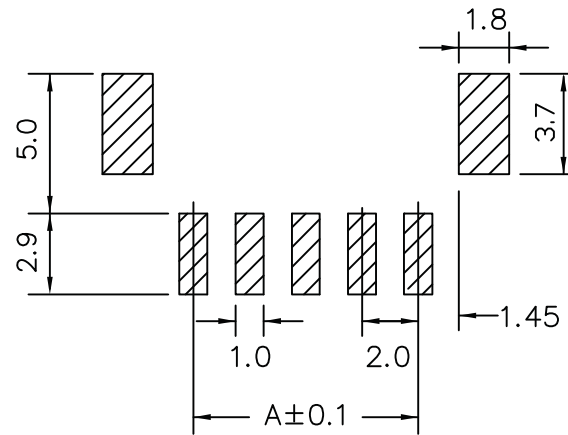
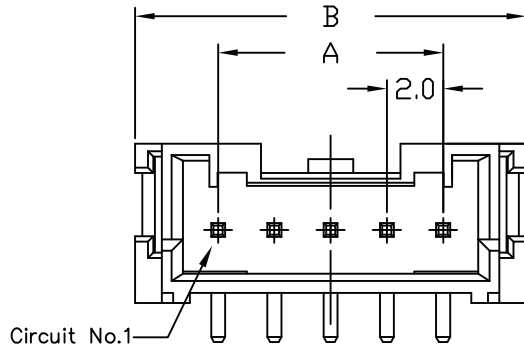
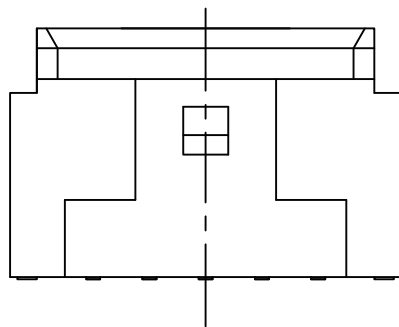


(2 to 6 circuits)



RECOMMENDED P.C. BOARD LAYOUT DIMM.

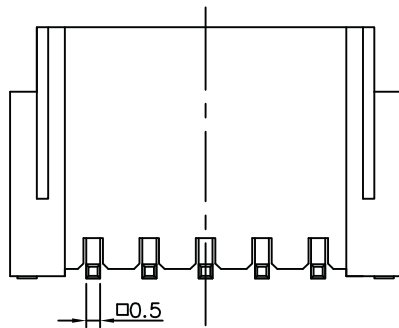

## Specifications

Current Rating: 3A AC/ DC (Max)AWG#22  
 Voltage Rating: 250V AC/ DC  
 Temperature Range: -25°C ~ + 85°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage:800V AC/Minute  
 Pin : Brass/ Tin-plated  
 Wafer Material: Nylon 6T,UL94V-0,natural  
 Solder tab:Brass/Tin-plated

| Poles | Dimension mm (in.) |             | Part No.   | Note. |
|-------|--------------------|-------------|------------|-------|
|       | A                  | B           |            |       |
| 2     | 2.0(0.079)         | 8.0(0.315)  | PA-VXCR-02 |       |
| 3     | 4.0(0.157)         | 10.0(0.394) | PA-VXCR-03 |       |
| 4     | 6.0(0.236)         | 12.0(0.472) | PA-VXCR-04 |       |
| 5     | 8.0(0.315)         | 14.0(0.551) | PA-VXCR-05 |       |
| 6     | 10.0(0.394)        | 16.0(0.630) | PA-VXCR-06 |       |

**RoHS Compliant**

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

PJECTION





**ORDER INFORMATION**




PA-VXCR-xx-LF  
 SERIES | | | | | LEADFREE  
 02~15WAY  
 REEL  
 180°SMT | CAP  
 NON POST

DESCRIPTION: 2.0mm Wire-to-Board Header SMD 180° Type

(7 to 9 circuits)

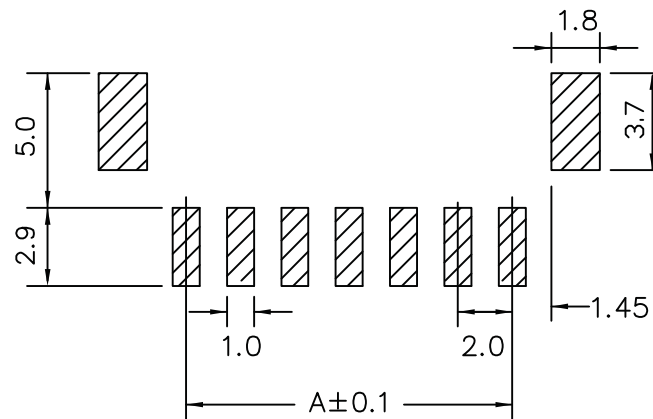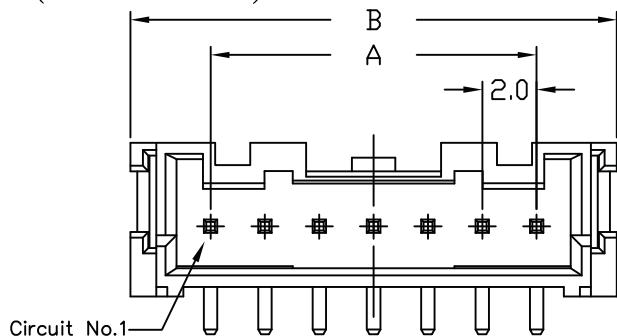

RECOMMENDED P.C.BOARD LAYOUT DIMM.

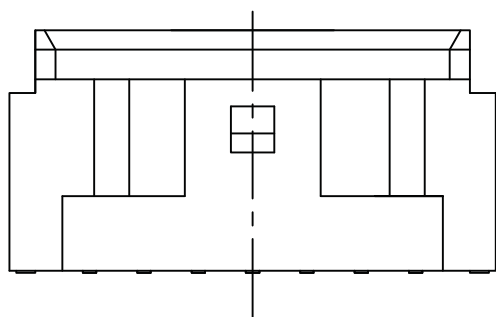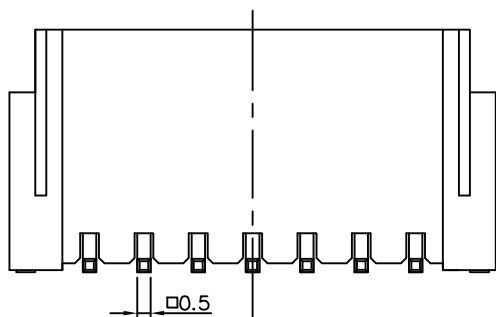

## Specifications

Current Rating: 3A AC/DC (Max)AWG#22  
 Voltage Rating: 250V AC/DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 800V AC/Minute  
 Pin : Brass/ Tin-plated  
 Wafer Material: Nylon 6T,UL94V-0,natural  
 Solder tab:Brass/Tin-plated

| Poles | Dimension mm (in.) |             | Part No.   | Note. |
|-------|--------------------|-------------|------------|-------|
|       | A                  | B           |            |       |
| 7     | 12.0(0.472)        | 18.0(0.709) | PA-VXCR-07 |       |
| 8     | 14.0(0.551)        | 20.0(0.787) | PA-VXCR-08 |       |
| 9     | 16.0(0.630)        | 22.0(0.866) | PA-VXCR-09 |       |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS


UNIT/ mm SCALE 1:1

DATE

SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PJECTION



ORDER INFORMATION



PA-VXCR-xx-LF  
 SERIES | REEL | LEADFREE  
 180°SMT | CAP | 02~15WAY  
 NON POST

煜倫股份有限公司



www.morethanall.com

DESCRIPTION: 2.0mm Wire-to-Board Header SMD 180° Type

(10 to 15 circuits)

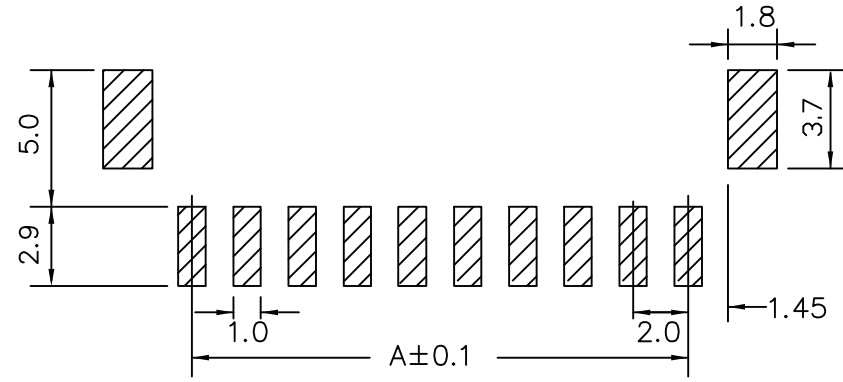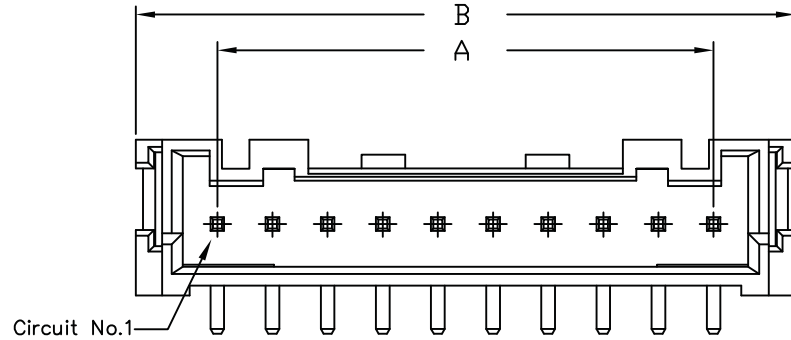


RECOMMENDED P.C.BOARD LAYOUT DIMM.

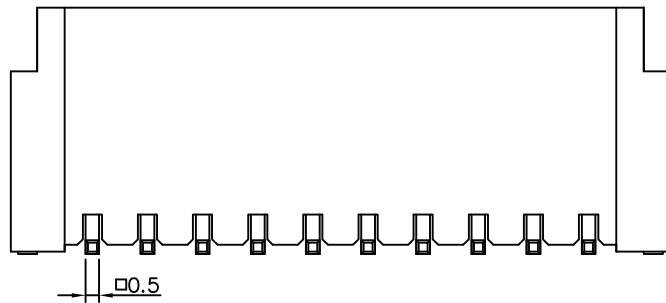

## Specifications

Current Rating: 3A AC/ DC (Max)AWG#22  
 Voltage Rating: 250V AC/ DC  
 Temperature Range: -25°C ~ + 85°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage:800V AC/Minute  
 Pin : Brass/ Tin-plated  
 Wafer Material: Nylon 6T,UL94V-0,natural  
 Solder tab:Brass/Tin-plated

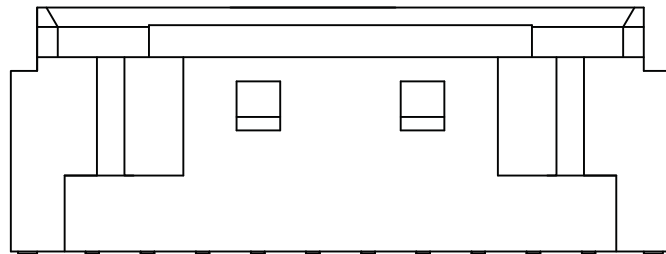

| Poles | Dimension mm (in.) |             | Part No.   | Note. |
|-------|--------------------|-------------|------------|-------|
|       | A                  | B           |            |       |
| 10    | 18.0(0.709)        | 24.0(0.945) | PA-VXCR-10 |       |
| 11    | 20.0(0.787)        | 26.0(1.024) | PA-VXCR-11 |       |
| 12    | 22.0(0.866)        | 28.0(1.102) | PA-VXCR-12 |       |
| 13    | 24.0(0.945)        | 30.0(1.181) | PA-VXCR-13 |       |
| 14    | 26.0(1.024)        | 32.0(1.260) | PA-VXCR-14 |       |
| 15    | 28.0(1.102)        | 34.0(1.338) | PA-VXCR-15 |       |

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/ mm SCALE 1:1

DATE


SIZE A4

X, ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±


P PROJECTION



**ORDER INFORMATION**

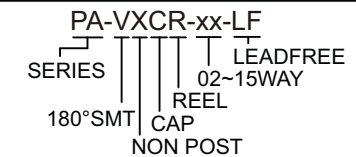

DESCRIPTION: 2.0mm Wire-to-Board Header SMD 180° Type

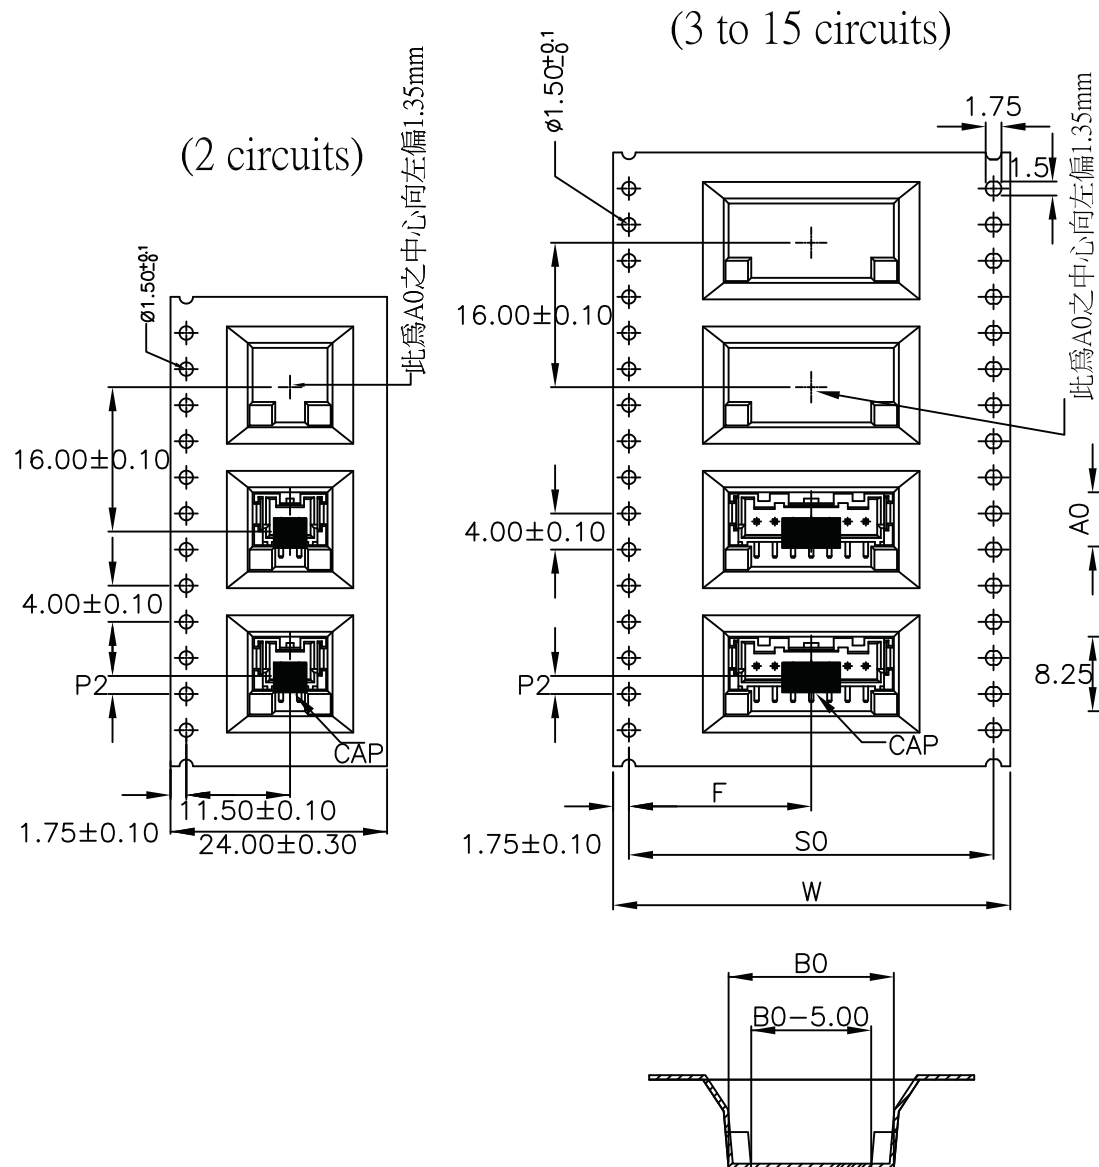

| PIN | W±0.30 | F          | P2        | S0         | A0±0.10 | B0±0.10 | K0±0.10 |
|-----|--------|------------|-----------|------------|---------|---------|---------|
| 02  | 24     | 11.50±0.10 | 2.00±0.10 |            | 6.0     | 8.30    | 9.9     |
| 03  | 32     | 14.20±0.10 | 2.00±0.10 | 28.40±0.10 | 6.0     | 10.30   | 9.9     |
| 04  | 32     | 14.20±0.10 | 2.00±0.10 | 28.40±0.10 | 6.0     | 12.30   | 9.9     |
| 05  | 32     | 14.20±0.10 | 2.00±0.10 | 28.40±0.10 | 6.0     | 14.30   | 9.9     |
| 06  | 44     | 20.20±0.15 | 2.00±0.10 | 40.40±0.10 | 6.0     | 16.30   | 9.9     |
| 07  | 44     | 20.20±0.15 | 2.00±0.10 | 40.40±0.10 | 6.0     | 18.30   | 9.9     |
| 08  | 44     | 20.20±0.15 | 2.00±0.15 | 40.40±0.10 | 6.0     | 20.30   | 9.9     |
| 09  | 44     | 20.20±0.15 | 2.00±0.15 | 40.40±0.10 | 6.0     | 22.30   | 9.9     |
| 10  | 44     | 20.20±0.15 | 2.00±0.15 | 40.40±0.10 | 6.0     | 24.30   | 9.9     |
| 11  | 44     | 20.20±0.15 | 2.00±0.15 | 40.40±0.10 | 6.0     | 26.30   | 9.9     |
| 12  | 56     | 26.20±0.15 | 2.00±0.15 | 52.40±0.10 | 6.0     | 28.30   | 9.9     |
| 13  | 56     | 26.20±0.15 | 2.00±0.15 | 52.40±0.10 | 6.0     | 30.30   | 9.9     |
| 14  | 56     | 26.20±0.15 | 2.00±0.15 | 52.40±0.10 | 6.0     | 32.30   | 9.9     |
| 15  | 56     | 26.20±0.15 | 2.00±0.15 | 52.40±0.10 | 6.0     | 34.30   | 9.9     |

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PJECTION



ORDER INFORMATION

PA-VXCR-xx-LF  
SERIES | REEL | LEADFREE  
180°SMT | CAP | 02~15WAY  
NON POST

DESCRIPTION: 2.0mm Wire-to-Board Header SMD 180° Type