

**Technical Data**

**Material:**

Pin(outer sleeve):Brass,machined CuZn38Pb2  
 Plating(outer sleeve):  
 Tin plated:2µm/80µ"nickel,gold or Tin plated  
 Insulator black(housing):PBT /PPS(ul94V-0)

**Electrical:**

Current rating:3Amps/contact max.  
 Contact resistance:≤4mΩ/contact  
 Insulation resistance:≥ 1000MΩ at V=100V  
 Operating voltage:60VAC/DC

**Mechanical:**

Operating temperatures:Gold Plated:-55°C to+105°C  
 Tin plated:-40°C to+105°C  
 Soldering temperature:+260°C,10s max

**RoHS Compliant**


TOLERANCES ARE




煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		X. ± .X ± 0.15 .XX ± 0.10 .XXX ± 0.05 ANG ± 3°
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PJECTION	



**ORDER INFORMATION**

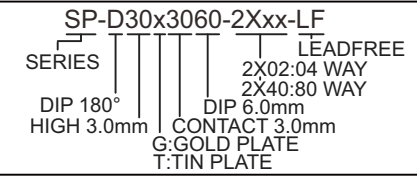

DESCRIPTION: