


### SPECIFICATIONS

1. Rating : DC 30V 0.5A ;
2. Contact resistance :  $\leq 0.03 \Omega$  ;
3. Insulation resistance :  $\geq 100M \Omega$  ;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N;
6. life test : 5,000 cycles .

### SCHEMATIC

PJ-R12F-05C	PJ-R12F-04C2	PJ-R12F-03C	PJ-R12F-03C2	PJ-R12F-04C3

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
⑧	COVER	1	PBT	
⑦	HOUSING	1	PBT	
⑥	AXIS SUPPORT	1	BRASS	Ni-Plating
⑤	CURVE PIECE	1	BRASS	Sn-Plating
④	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
③	CURVE PIECE	1	BRASS	Sn-Plating
②	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
①	FLAT PIECE	1	BRASS	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

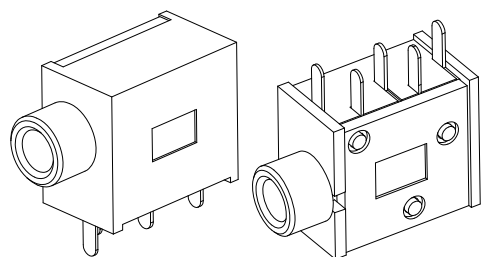

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°



**ORDER INFORMATION**

PJ-R12F-xxx-LF  
SERIES | LEADFREE  
SCHEMATIC  
FULL METAL  
HIGH 12.4mm  
DIP 90°

**煜倫股份有限公司**

www.morethanall.com

DESCRIPTION: PHONE JACK