


Circuit 1

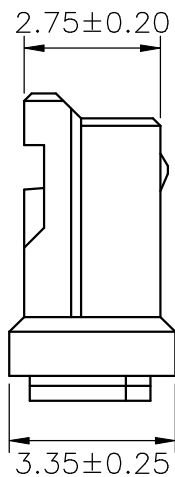

SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 350V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Natural(White)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
ZHQ-H-02	1.50	4.10
ZHQ-H-03	3.00	5.60
ZHQ-H-04	4.50	7.10
ZHQ-H-05	6.00	8.60
ZHQ-H-06	7.50	10.10
ZHQ-H-07	9.00	11.60
ZHQ-H-08	10.50	13.10
ZHQ-H-09	12.00	14.60
ZHQ-H-10	13.50	16.10
ZHQ-H-11	15.00	17.60
ZHQ-H-12	16.50	19.10
ZHQ-H-13	18.00	20.60
ZHQ-H-14	19.50	22.10
ZHQ-H-15	21.00	23.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PJECTION



ORDER INFORMATION

ZHQ-H-xx-LF
 SERIES | LEADFREE
 | 02-15WAY
 HOUSING

DESCRIPTION: 1.50mm PITCH HOUSING