

NOTES:

1. MATERIAL:

1.1 HOUSING: HALOGEN FREE PLASTIC,UL94V-0.

1.2 CONTACT: COPPER ALLOY

2.CONTACT:

L:50U" NICKEL OVERALL,
120U" MIN. LEAD-FREE(PURE TIN).

1:50U" NICKEL OVERALL,
GOLD FLASH OVER ALL(1U" MIN).

N:50U" NICKEL OVERALL,
120U" MIN. PURE TIN(MATT TIN) ALLOVER .

3. REFLOW SOLDER CAPABLE TO 260°C

CKT	Dim A	Dim B
2	1.5	4.3
3	3.0	5.8
4	4.5	7.3
5	6.0	8.8
6	7.5	10.3
7	9.0	11.8
8	10.5	13.3
9	12.0	14.8

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ±

.XX ±


.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

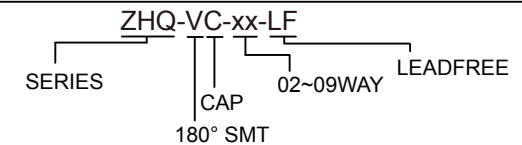

DESCRIPTION: 1.5mm WT B Header SMT Vertical Type