
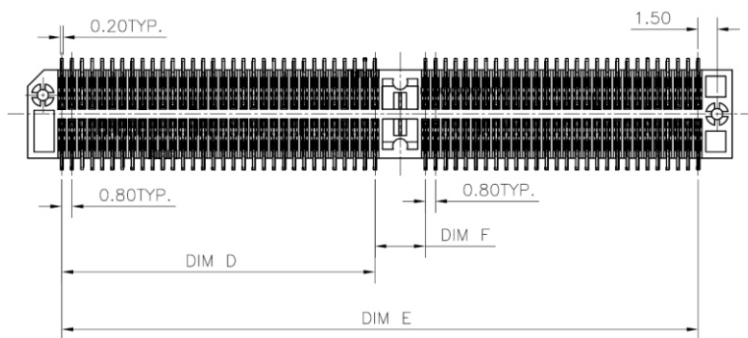
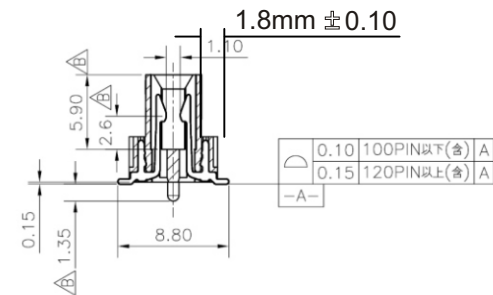
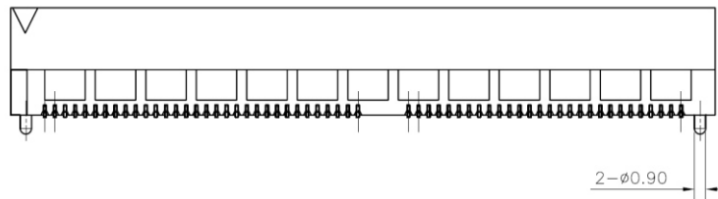


NOTES:

1. MATERIAL:
  - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.
  - 1.2 CONTACT: COPPER ALLOY
2. FINISH:
  - 2.1 CONTACT: GOLD FLASH PLATING OVERALL. 50μ" MIN. NICKEL UNDERPLATING OVERALL.
3. REFLOW SOLDER CAPABLE TO 260°C PER **Morethanall** SPEC.
4. IF CKT AT 20-70PIN DID NOT DEFEND THE POLARIZATION KEY; THAN CKT >= 80PIN HAVE ALREADY DEFEND THE POLARIZATION KEY



P/N	Ckts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Dim. H
E08-V8PC-020	20	--	9.40	12.60	--	7.20	0.80	0	0
E08-V8PC-040	40	--	17.40	20.60	--	15.20	0.80	0	0
E08-V8PC-060	60	--	25.40	28.60	--	23.20	0.80	0	0
E08-V8PC-070	70	--	29.40	32.60	--	27.20	0.80	0	0
E08-V8PC-080	80	18.80	36.60	39.80	16.80	34.40	4.00	2.40	2.20
E08-V8PC-090	90	20.40	40.60	43.80	18.40	38.40	4.00	2.40	2.20
E08-V8PC-100	100	22.80	44.60	47.80	20.80	42.40	4.00	2.40	2.20
E08-V8PC-120	120	26.80	52.60	55.80	24.80	50.40	4.00	2.40	2.20
E08-V8PC-140	140	30.80	60.60	63.80	28.80	58.40	4.00	2.40	2.20

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

E08-V8PC-xxx-LF  
SERIES | | | LEADFREE  
| | | 040-070WAY  
| | | MYLAR  
| | | POST  
| | | WIDE 8.80mm  
| | | 180°SMT

DESCRIPTION: