
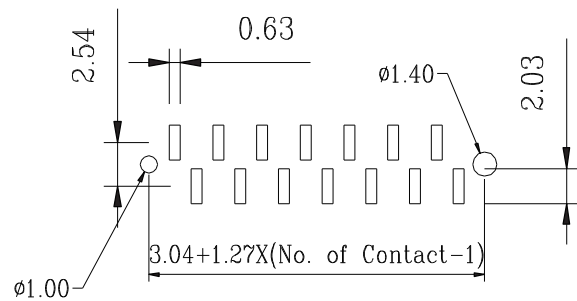


# SPECIFICATIONS

- \* Current Rating : 1 Amps
- \* Insulator resistance: 5000 Megohms min.
- \* Dielectric withstanding: AC 500 V
- \* Operating Temperature: -40°-+105°C
- \* Max Processing Temp: 230° for 30~60 seconds  
(260° for 10 seconds)
- \* Contact Material: Phosphor bronze
- \* Housing: L.C.P (UL 94 V-0)

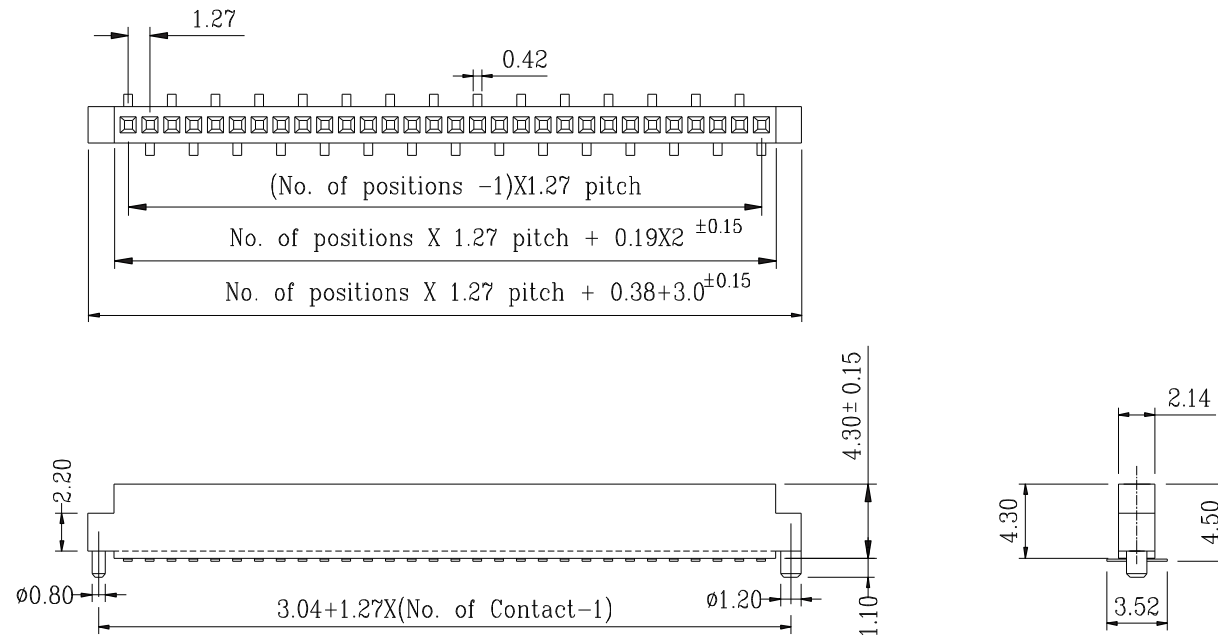

PCB LAYOUT

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1:1

DATE


SIZE A4

PJECTION

X. ± 0.20  
.X ± 0.15  
.XX ± 0.10  
.XXX ± 0.05  
ANG ±



**ORDER INFORMATION**

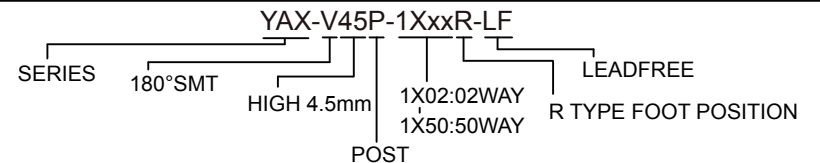

DESCRIPTION: 1.27mm SMD Socket post type (Base:4.5mm)

**煜倫股份有限公司**

[www.morethanall.com](http://www.morethanall.com)