


RECOMMENDED P.C.B LAYOUT

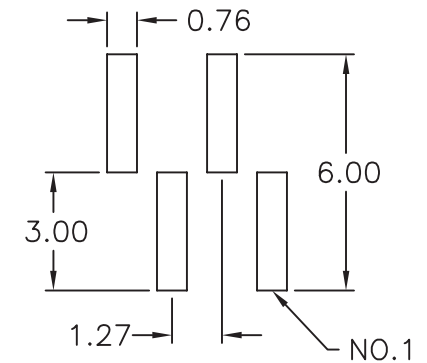

Specifications

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T

RoHS Compliant



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE


SIZE A4 PROJECTION

TOLERANCES ARE

X. ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.13
 ANG ±



ORDER INFORMATION

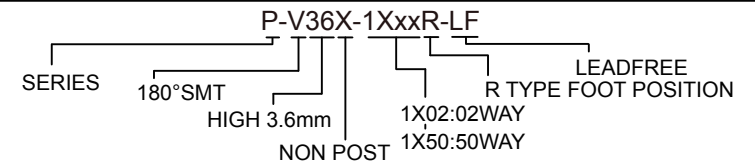

DESCRIPTION: 1.27 PIN HEADER SINGLE ROW SMT TYPE BASE 2.54H