

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 15 AMP.
Dielectric Withstanding Voltage: AC 3100V For 1 minute.
Insulator Resistance: 1000M Ω min. at DC 500V.
Contact Resistance: 8m Ω max. at DC 100mA.
Operating Temperature: -55°C ~ +125°C .

***RoHS Compliant**

Note: d26 Contact Length 7.65mm,
Other Pin Contact Length 6.00mm,
Dip Length 2.9mm.

CONTACT NO.	L
z4,z8,z12,z16,z20,z24,z28,z32	6.00
d6,d10,d14,d18,d22,d30	6.00
d26	7.65

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/ mm SCALE 1:1

DATE


SIZE A4

X. ± 0.50
X. ± 0.25
.XX ± 0.15
.XXX \pm
ANG \pm

P PROJECTION



ORDER INFORMATION

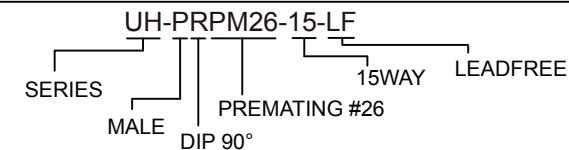

DESCRIPTION: