


ELECTRICAL PROPERTIES

1. 100% OPEN SHORT MIS-WIRE TEST
2. CONTACT RESISTANCE 3 OHM MAX
3. INSULATION RESISTANCE 10 MEGA OHM MIN
4. HIPOT TEST DC 300V 10MS

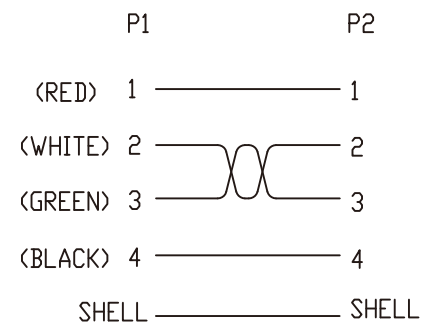

⑤	M3.0牙螺母	2/2	PCS
④	PVC 45P BLACK	20	G
③	USB A FEMALE GOLD G/F, COLOR:WHITE	1	PCS
②	USB A MALE GOLD G/F, COLOR:WHITE	1	PCS
①	UL2725 #28/1P+#28/2C+AEB(AL) OD:3.5 BLACK	1	PCS
NO.	DESCRIPTION	Q' TY	UNIT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION



ORDER INFORMATION

UBX2-4A4A28PE-E2F-LF

SERIES

LEADFREE
610mm
MALE TO FEMALE
EAR
PANEL
28 AWG

4 PIN TO 4 PIN A TYPE

DESCRIPTION: