








MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 SHELL: STAINLESS STEEL, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED
 CAP: HI-TEMP. PLASTIC (UL 94V-0), BLACK

SPECIFICATION

CURRENT RATING: 3 AMP MAX
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
 CONTACT RESISTANCE:
 40m OHMS MAX INITIAL
 50m OHMS MAX AFTER ENVIRONMENTAL TEST
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 300V
 OPERATION TEMPERATURE: -40°C~+85°C

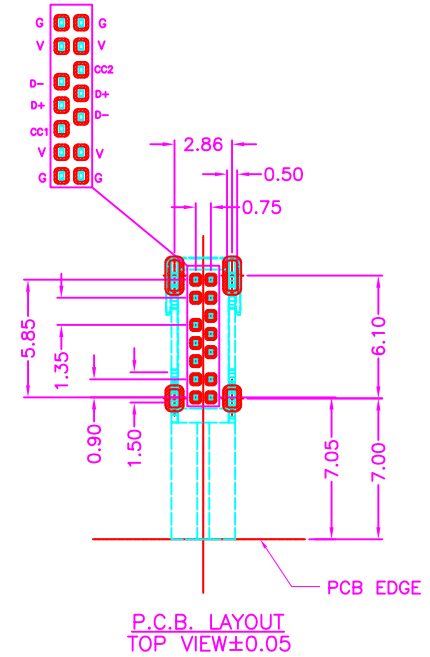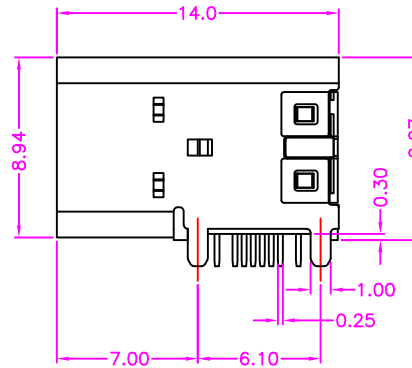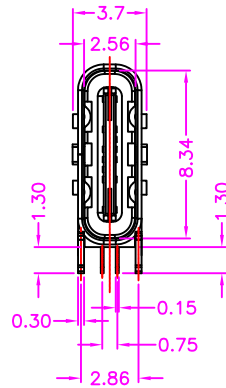

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20


DATE

.XXX ± 0.10

ANG ±

SIZE A4

PJECTION



ORDER INFORMATION

USB-SUMM-24C14-LF
 SERIES | LEADFREE
 METAL FOOT
 UPRIGHT
 FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: USB C TYPE, PCB MOUNT, UPRIGHT DIP TYPE, METAL SHIELD, 14PIN