


FEATURES:

- . 2-20 Circuits
- . Housing, UL 94V-2 Nylon 6/6, Natural
- . Designed for parallel and perpendicular board stacking, connection
- . Mates with .045"[1.14mm] square pins or round pins

SPECIFICATIONS:


- . Current rating: 7A AC. DC
- . Voltage rating: 250V AC. Maximum
- . Temperatur range: -40°C ~ +105°C
- . Contact resistance: Initial Value/10mΩ max.
After environmental testing /20mΩ max.
- . Insulation resistance: 5000 MΩ min
- . Withstand Voltage: 1500V AC/minute
- . Applicable PC board thickness: .063"[1.6mm]

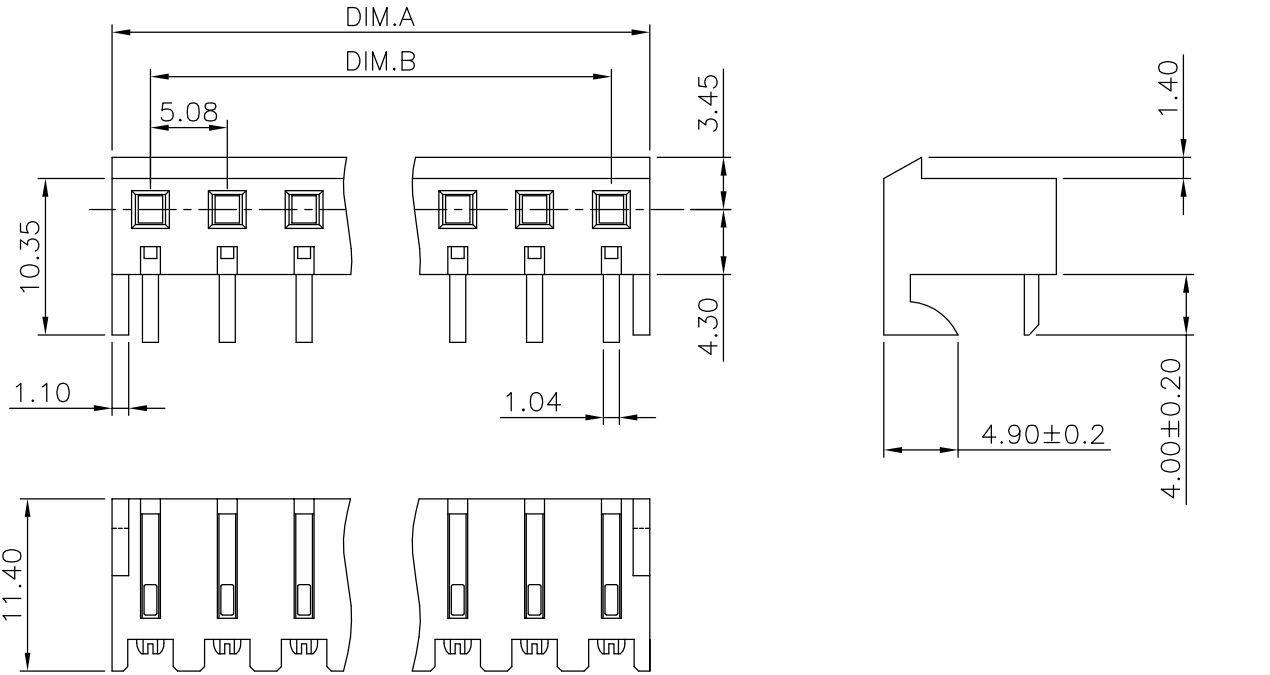

PIN數	DIM.A	DIM.B	Tolerances
02	10.16	5.08	±0.25
03	15.24	10.16	
04	20.32	15.24	
05	25.40	20.32	
06	30.48	25.40	
07	35.56	30.48	±0.30
08	40.64	35.56	
09	45.72	40.64	
10	50.80	45.72	
11	55.88	50.80	
12	60.96	55.88	
13	66.04	60.96	

PIN數	DIM.A	DIM.B	Tolerances
14	71.12	66.04	±0.36
15	76.20	71.12	
16	81.28	76.20	
17	86.36	81.28	
18	91.44	86.36	
19	96.52	91.44	
20	101.6	96.52	±0.42

編號	材質	數量
1	尼龍66	1
2	黃銅	2~20
3	真空盒 No.1396 8 行底座 -PB	

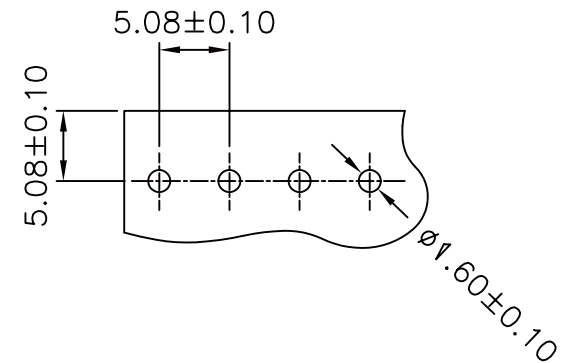

Recommended Hole Dimensions

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

X. ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 2'

PJECTION



ORDER INFORMATION

LKX-S-xx-LF
SERIES | LEADFREE
02-20WAY
SIDE ENTRY

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com