


MATERIALS:

- HOUSING-PA9T GN2330
HEAT RESISTANT PLOYAMIDE RESIN
BLACK COLOR, UL94V-0
 - INSERT HOUSING-DSM STANYL TE250F6 (NYLON-46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V-0.
 - CONTACTS-0.35mm THICK PHOS-BRONZE
PLATED WITH HARD GOLD AND
GOLD FLASH IN SOLDER AREA.
 - HOLD DOWN-0.35mm THICK COPPER ALLOY,
PLATED WITH TIN.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

NOTE:

1. A AND B HIGHEST POINT
MUST OVER C FLAT SURFACE.
2. THE MAXIMUM DISTANCE (0.15m/m)
BETWEEN LOWEST AND HIGHEST
ON A AND B FLAT SURFACE.

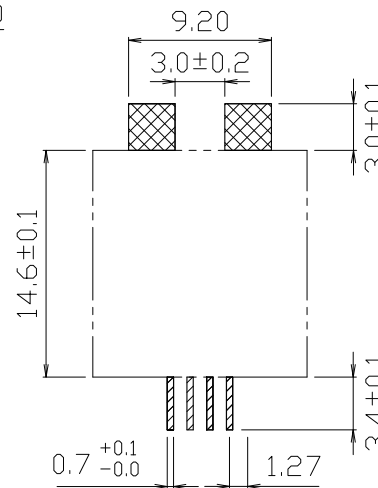

PCB LAYOUT
-Ref.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG ±

PJECTION



ORDER INFORMATION

MJV13-KX06-0604-LF

SERIES | | | LEADFREE
| | | 6P4C
| | | 06u" GOLD
| | | NON EAR
| | | BLACK

DESCRIPTION: 6 POSITION TOP ENTRY SMT TYPE
W/O BOARD LOCK PCB JACK