



P.C.B LAYOUT

Features:

- 4 ~ 12 circuits available
- Material: PA66 UL 94-V2 or 94-V0

Specification:

- Current rating: 5A AC, DC
- Voltage rating: 300V AC, DC
- Insulation resistance: 1000MΩ Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -25° C ~ 90° C

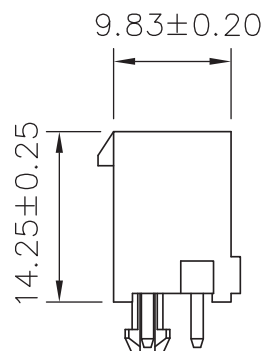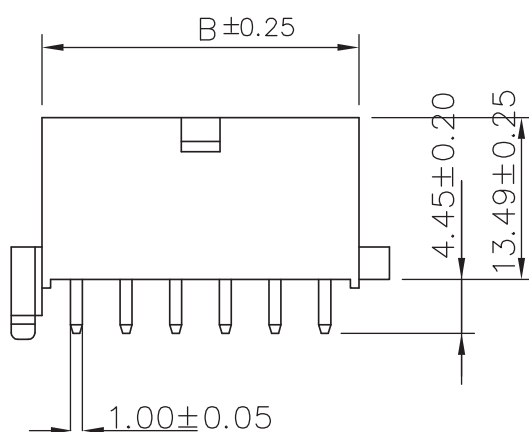

CIRCUITS	Dimensions		
	A	B	C
04	4.14	9.83	15.01
06	8.28	13.97	19.15
08	12.42	18.11	23.27
10	16.56	22.25	27.41
12	20.70	26.39	31.55

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.40
.XX ± 0.20
.XXX ± 0.08
ANG ±

PPOJECTION



ORDER INFORMATION

ML-PDP-2Xxx-LF
SERIES | LEADFREE
2X02:04WAY
2X12:24WAY
POST
DIP 180°
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION:

