


T:1.6 Dimensions of PC board holes  
Tolerance : ±0.1(Printed-bottom view)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

RCAA3-			
TYPE	A	B	C

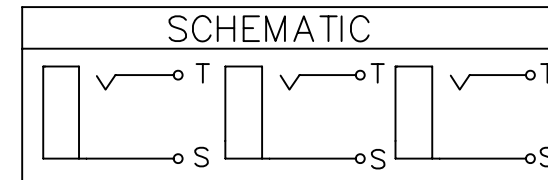

6	SEALED PLATE	1	BRASS	t=0.2	MB:Cu	Cu/Sn	PLATED
5	TERMINAL	3	BRASS	t=0.4	MB:Cu	Cu/Sn	PLATED
4	COVER	1	ABS				
3	WASHER	3	ABS				
2	OUTER CONTACT	3	BRASS	t=0.4	MB:Cu	Cu/Sn	PLATED
1	HOUSING	1	ABS				
LTR	PART NAME	QTY	MATERIAL				REMARK

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1


.XXX ±

DATE

ANG ±

SIZE A4

PJECTION



ORDER INFORMATION

RCAA3-JR53E2WRY-02-LF

SERIES

LEADFREE

02 WAY

WHITE/RED/YELLOW

JACK

5.3mm

DIP 90°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: PIN JACK