


CKT (0.5mm pitch)	W	PCS/REEL	REEL/CARTON	SUM(PCS)	
4	16	2000	15	30000	
5		2000	15	30000	
6		2000	15	30000	
7		2000	15	30000	
8		2000	15	30000	
9		2000	15	30000	
10		2000	15	30000	
11		24	2000	11	22000
12			2000	11	22000
13			2000	11	22000
14	2000		11	22000	
15	2000		11	22000	
16	2000		11	22000	
17	2000		11	22000	
18	2000		11	22000	
19	2000		11	22000	
20	2000		11	22000	
21	2000		11	22000	
22	2000		11	22000	
23	2000		11	22000	
24	2000		11	22000	

NOTE(注):

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ±0.2mm.  
(10片孔距累积公差±0.2mm.)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.  
(载带拱/弧形MAX:1/100mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.  
(所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: BLACK CONDUCTIVE POLYSTYRENE.  
(载带材料: 黑色导电聚苯乙烯.)
5. THICKNESS: 0.30±0.05mm. (载带厚度: 0.30±0.05mm.)
6. PACKING LENGTH PER REEL: 25 METERS. (每卷包装长度: 25米.)
7. COMPONENT LOAD PER REEL: 2000 PCS. (每卷包装数量: 2000只.)
8. FOR 0.5mm PITCH CONNECTOR. (0.5mm间距连接器适用.)
9. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充.
10. PART NO. (零件料号);

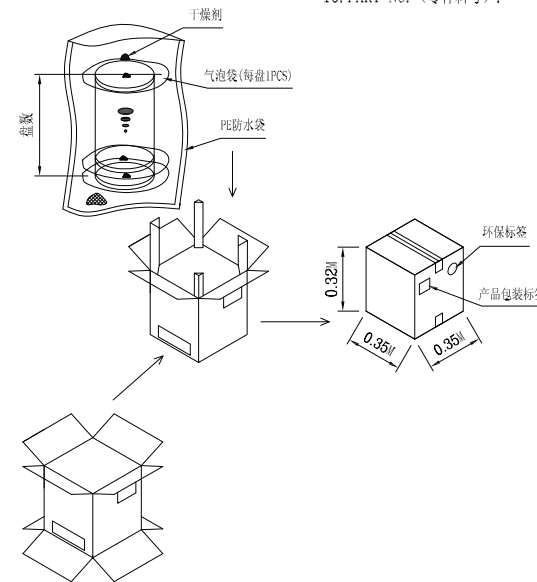

CKT (0.5mm pitch)	BO	W	F
4	6.4	16	7.5
5	6.9		
6	7.4		
7	7.9		
8	8.4		
9	8.9		
10	9.4		
11	9.9		
12	10.4		
13	10.9		
14	11.4		
15	11.9		
16	12.4		
17	12.9		
18	13.4		
19	13.9		
20	14.4		
21	14.9		
22	15.4		
23	15.9		
24	16.4		

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



ORDER INFORMATION

FPV-WRD15GF3R-xx-LF  
SERIES | REEL | LEADFREE  
90°SMT | GOLD | 04-60WAY  
ROTARY ZIF | HIGH 1.5mm | DUAL CONTACTS  
CABLE t=0.3mm

DESCRIPTION: FPC0.5Pitch-1.5H前插后掀成品图