
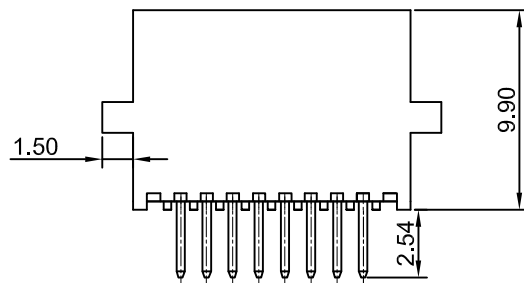
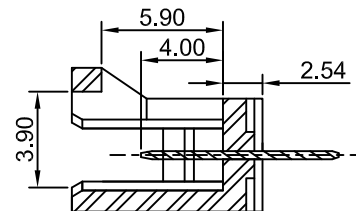


P.C.B LAYOUT

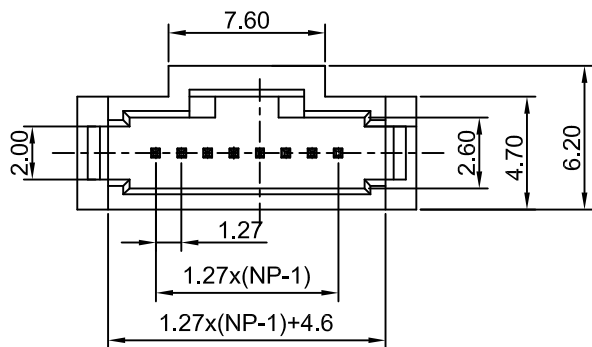

◆ SPECIFICATIONS

CURRENT RATING: 1 AMP.

CONTACT RESISTANCE: 30 MΩ MAX.

INSULATION RESISTANCE: 1000 MΩ MIN.

WITHSTANDING VOLTAGE: 250V AC / DC.

◆ ENVIRONMENTAL

TEMPERATURE RANGE: -40°C~+105°C.

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PJECTION

X. ±  
.X ± 0.40  
.XX ± 0.25  
.XXX ± 0.15  
ANG ±



ORDER INFORMATION

MOD50-BD-1Xxx-LF

SERIES

LEADFREE

1X10:10WAY

1X50:50WAY

DIP 180°

BOX

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 1.27mm PITCH 180° SHROUDED HEADER