

RECOMMENDED PCB LAYOUT

DIMENSION

A	NX7.62
B	(N-1)X7.62

N= NUMBER OF CONCATS

Poles	Tolerance
2P-6P	±0.20
7P-12P	±0.30
13P-16P	±0.40

Material:

- Item ③ Male contact pin : Copper Tin plated
- Item ⑥ Terminal (housing): Thermoplastic (UL94V-0)

Electrical: cULus TUV

- Voltage rating: 300V 750V
- Current rating: 20A 15A
- Withstanding Voltage: 1.6 KV 6KV
- Operating temperature: -40°C to +115°C

- Soldering temperature: 250°C±10°C/5 Sec

- Safety Approval:

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/ mm SCALE 1:1

DATE


SIZE A4

X. ± 0.50  
 .X ± 0.30  
 .XX ± 0.10  
 .XXX ±  
 ANG ± 1°

PJECTION



ORDER INFORMATION

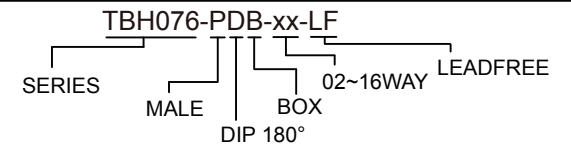

DESCRIPTION: