


NOTES:
 1.MATERIAL:
 HOUSING:LCP 30% G/F UL94 V-0
 COLOR:BLACK
 CONTACT:PHOSPHOR BRONZE T=0.25mm
 BOARD LOCK:BRASS C2680H T=0.30mm
 SLICE:SUS T=0.25mm
 2.FINISH:
 CONTACT:GOLD FALSH/TIN PLATING ON CONTACT AREA
 100u" MIN.TIN PLATING ON SOLDERTAILS
 50u" MIN.NICKEL UNDERPLATING OVER ALL
 BOARD LOCK:100u" MIN. TIN PLATING ON SOLDERTAILS
 50u" MIN.NICKEL UNDERPLATING OVER ALL

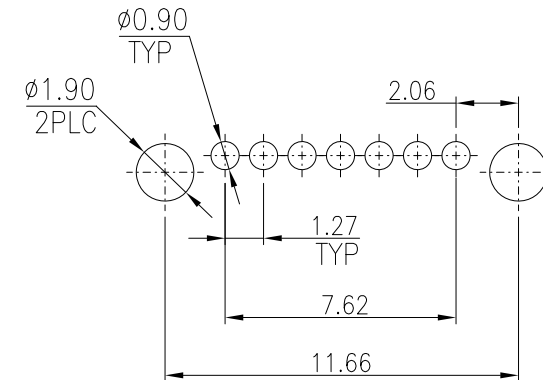

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ± 0.35
 .XX ± 0.20
 .XXX ±
 ANG ± 3°

PJECTION



ORDER INFORMATION

SATA-SD09ZL-07-LF

SERIES | | | | | | | LEADFREE
 7 WAY
 LATCH
 CLIP
 9.0mm
 DIP 180°
 FEMALE

DESCRIPTION: SATA 7P Female Dip VT With Latch & Bardlock