
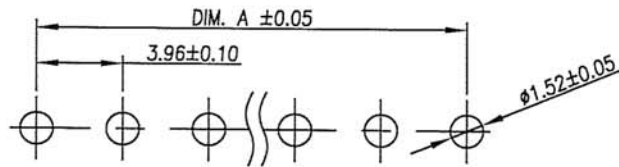


| NO. OF CONTACT | Dimension |       | NO. OF CONTACT | Dimension |       |
|----------------|-----------|-------|----------------|-----------|-------|
|                | A         | B     |                | A         | B     |
| 02             | 3.96      | 8.06  | 10             | 35.64     | 39.74 |
| 03             | 7.92      | 12.02 | 11             | 39.60     | 43.70 |
| 04             | 11.88     | 15.98 | 12             | 43.56     | 47.66 |
| 05             | 15.84     | 19.94 | 13             | 47.52     | 51.62 |
| 06             | 19.80     | 23.90 | 14             | 51.48     | 55.58 |
| 07             | 23.76     | 27.86 | 15             | 55.44     | 59.54 |
| 08             | 27.72     | 31.82 | 16             | 59.40     | 63.50 |
| 09             | 31.68     | 35.78 |                |           |       |

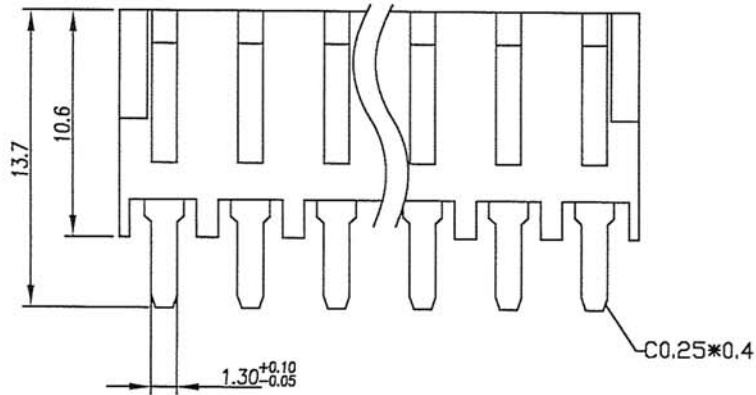

P.C.B LAYOUT

NOTES:

SPECIFICATION

- 1.Current : 4A max.
- 2.Voltage: 250V AC max.
- 3.Insulation Resistance: 1000 Megohms Min.
- 4.Contact Resistance: 10 Milliohms Max.
- 5.Dielectric Withstanding Voltage: 1000V AC
- 6.Operating Temperature: 0°C to +50°C

MATERIAL

- 1.Contact: Brass
- 2.Housing:Nylon,UL 94V-2
- 3.Plated:Underplating Nickel Plating for All Min 50u"  
Solder Tail Tin plating 90/10 Plating 100u"~200u"

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1:1

DATE

SIZE A4

PJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



ORDER INFORMATION

KX-T-xx-LF  
SERIES | LEADFREE  
02~16WAY  
TOP ENTRY

DESCRIPTION: