
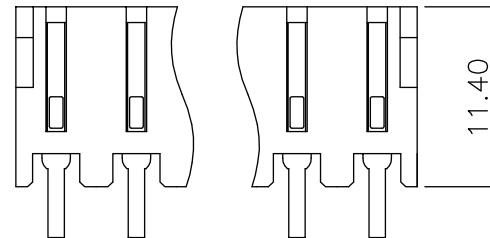


**FEATURES:**

- . 2-20 Circuits
- . Housing, UL 94V-2 Nylon 6/6, Natural
- . Designed for parallel and perpendicular board stacking, connection
- . Mates with .045"[1.14mm] square pins

**SPECIFICATIONS:**

- . Current rating: 7A AC, DC
- . Voltage rating: 250V AC, Maximum
- . Temperature range: -40°C ~ +105°C
- . Contact resistance: Initial Value/10mΩ max.  
After environmental testing /20mΩ max.
- . Insulation resistance: 5000 MΩ min
- . Withstand Voltage: 1500V AC/minute
- . Applicable PC board thickness: .063"[1.6mm]

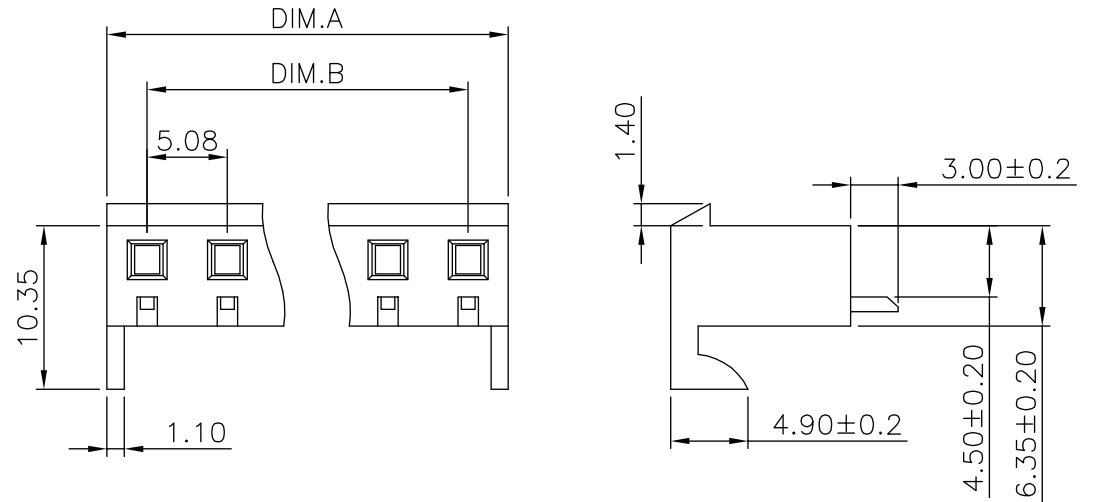

PIN 數	DIM.A	DIM.B	Tolerances
02	10.16	5.08	±0.25
03	15.24	10.16	
04	20.32	15.24	
05	25.40	20.32	
06	30.48	25.40	
07	35.56	30.48	
08	40.64	35.56	±0.30
09	45.72	40.64	
10	50.80	45.72	
11	55.88	50.80	
12	60.96	55.88	
13	66.04	60.96	

PIN 數	DIM.A	DIM.B	Tolerances
14	71.12	66.04	±0.36
15	76.20	71.12	
16	81.28	76.20	
17	86.36	81.28	
18	91.44	86.36	
19	96.52	91.44	
20	101.6	96.52	±0.42

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

X, ±  
.X ± 0.20  
.XX ± 0.10  
.XXX ± 0.05  
ANG ±

PJECTION



**ORDER INFORMATION**

LKX-T-xx-LF  
SERIES | LEADFREE  
02~20WAY  
TOP ENTRY

DESCRIPTION: