

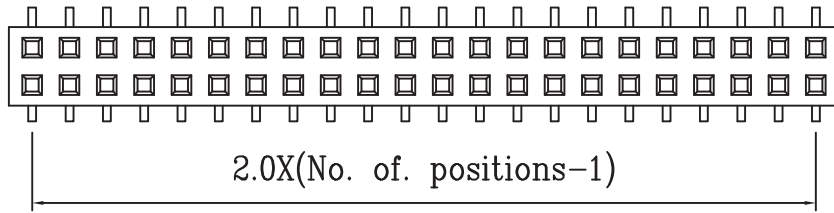
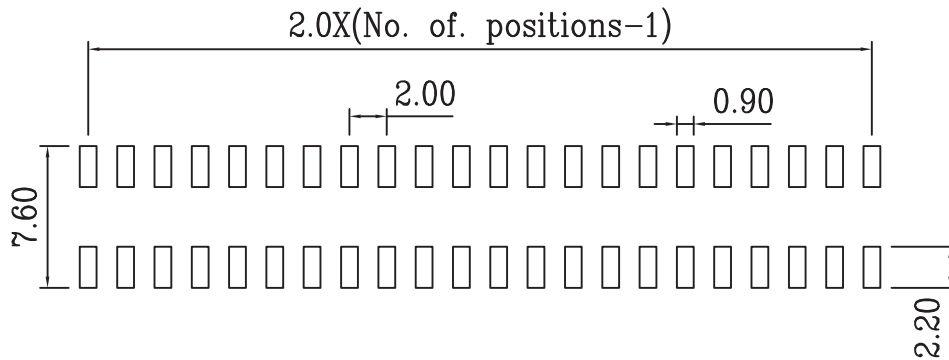


# SPECIFICATIONS

- \* Current Rating : 1 Amps
- \* Insulator resistance: 5000 Megohms min.
- \* Dielectric withstanding: AC 500 V
- \* Operating Temperature: -40°-+105°C
- \* Max Processing Temp: 230° for 30 seconds  
(260° for 7 seconds)
- \* Contact Material: Phosphor bronze
- \* Housing: L.C.P. (UL 94 V-0)



$$(2.0 \times \text{No. of positions}) + 0.5$$

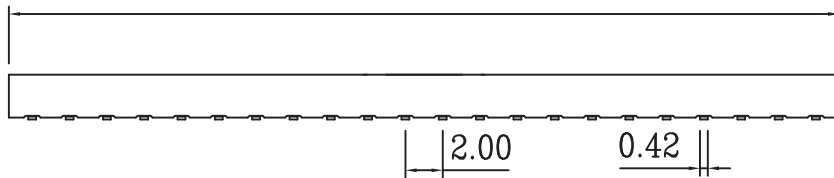

P.C.B. layout

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE


SIZE A4

PJECTION

X. ± 0.30  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.20  
ANG ± 1°



**ORDER INFORMATION**

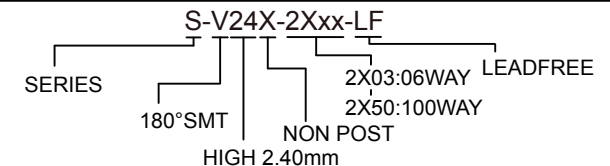

DESCRIPTION: 2.0mm Female Socket h=2.4mm type