
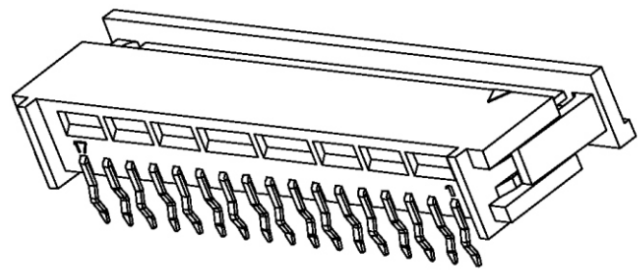


RECOMMENDED PCB LAYOUT



Notes

- 1. FEATURE:
 - Insulator: PBT+30% G/F, 94V-0, Black
 - Contact: Phosphor Bronze, Tin Plating Over Nickel.
- 2. SPECIFICATION:
 - Current Rating: 1A AC,DC
 - Voltage Rating: 250V,AC RMS
 - Withstanding Voltage: 1000V AC/minute.
 - Contact Resistance: 25 milliohms max.
 - Insulation Resistance: 1000 Megohms min.
 - Temperature range: -40 to + 85 Degree C
 - Applicable PC Board Thickness: 1.60mm [.063"]

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY


CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

- X, ±
- .X ±
- .XX ±
- .XXX ±
- ANG ±



ORDER INFORMATION

FPC-RZBX-17-LF
 SERIES | LEADFREE
 | 17 WAY
 | NON POST
 | BOTTOM CONTACT
 | ZIF
 | DIP 90°

DESCRIPTION: