


## SPECIFICATIONS

- \* Current Rating : 1 Amps
- \* Insulator resistance: 5000 Megohms min.
- \* Dielectric withstanding: AC 500 V
- \* Operating Temperature: -40°-+105°C
- \* Max Processing Temp: 230° for 30 seconds  
(260° for 7 seconds)
- \* Contact Material: Phosphor bronze
- \* Housing: L.C.P. (UL 94 V-0)

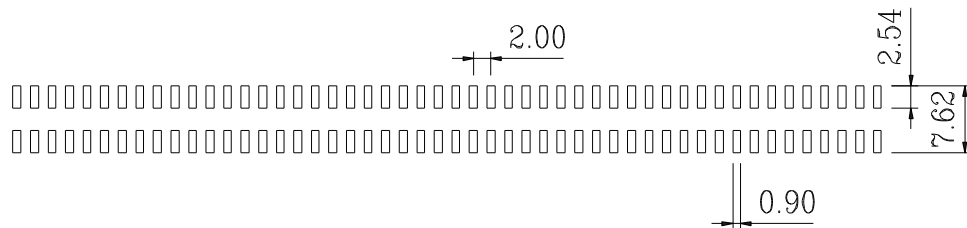

P.C.B.layout

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/ mm SCALE 1:1

DATE


SIZE A4

X. ± 0.50  
X ± 0.35  
.XX ± 0.25  
.XXX ± 0.05  
ANG ±

PJECTION



**ORDER INFORMATION**

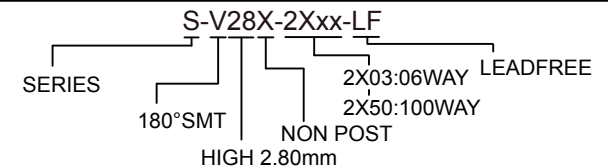

DESCRIPTION: 2.0mm Female Socket h=2.8mm type