



Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
 Contacts: Copper Alloy.


Electrical Characteristics:

Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 1000M Ω min. at DC 500V.
 Contact Resistance: 20m Ω max. at DC 100mA.
 Operating Temperature: -55°C ~ +125°C .

***RoHS Compliant**

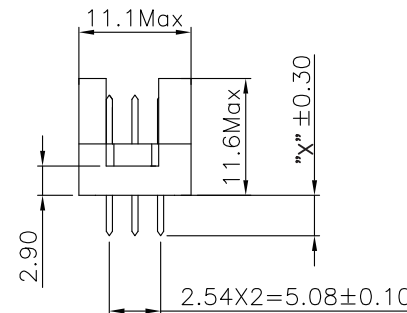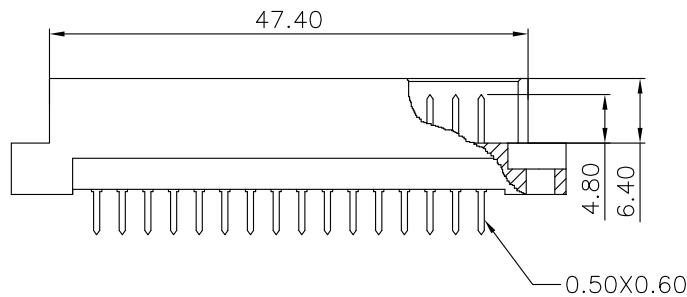

DIMENSION OF "X"
 02 = 2.5mm
 BLANK = 4.0mm
 13 = 13.0mm
 17 = 17.0mm

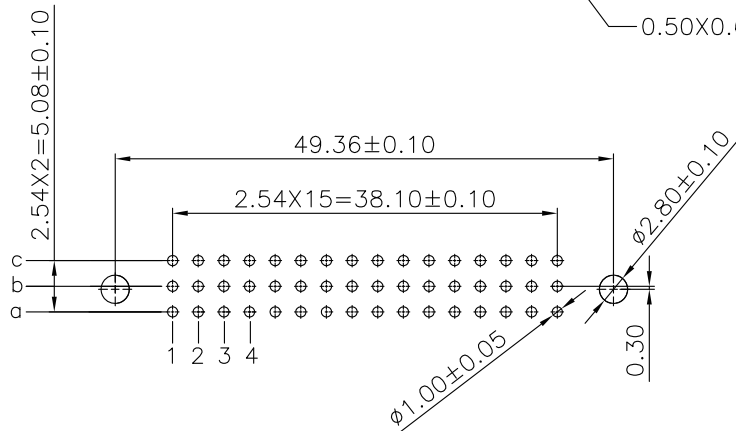

P.C. Board Layout

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm SCALE 1:1


DATE

SIZE A4


TOLERANCES ARE

X. \pm
 .X \pm
 .XX \pm
 .XXX \pm
 ANG \pm

P PROJECTION



ORDER INFORMATION

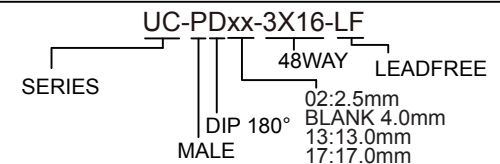

DESCRIPTION: