


12.	Cover	PBT	1	Black Color
11.	Housing	PBT	1	Black Color
10.	Tip Lead(TOP)	0.4T Brass	1	Silver Plated
9.	Tip Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
8.	Ring Lead(TOP)	0.4T Brass	1	Silver Plated
7.	Ring Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
6.	Earth Terminal(TOP)	0.4T Phosphor Copper	1	Silver Plated
5.	Tip Spring(DOWN)	0.25T Phosphor Copper	1	Silver Plated
4.	Break Terminal(DOWN)	0.4T Bronze	1	Silver Plated
3.	Break Terminal(DOWN)	0.4T Bronze	1	Silver Plated
2.	Ring Spring(DOWN)	0.3T Phosphor Copper	1	Silver Plated
1.	Earth Terminal(DOWN)	0.4T Phosphor Copper	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

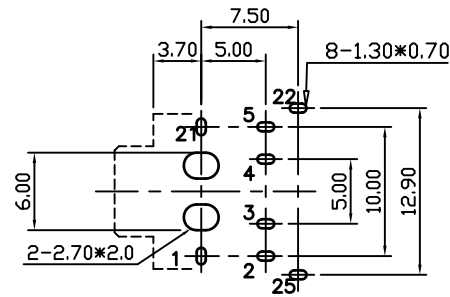

Pin Hole Layout  
(Jack Bottom View)

**SPECIFICATIONS:**

Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstand Voltage : AC 500V for one minute  
 Remark: ▲ : The Most Important Dimension

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±


DATE

.XXX ±

ANG ±

SIZE A4

P PROJECTION



**ORDER INFORMATION**

PJB1-RKEM24-08-LF  
 SERIES | | | | | LEADFREE  
 | | | | | 08 WAY  
 | | | | | 2.4mm HOLE  
 | | | | | MIDDLE  
 | | | | | EAR  
 | | | | | BLACK

**煜倫股份有限公司**

www.morethanall.com

DESCRIPTION: