


R1 : 1.50---H=4.85mm
 R2 : 2.80---H=6.15mm
 R3 : 2.10---H=5.45mm

SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Contacts resistance :20 m ohms max.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40°-+105°C
- * Max Processing Temp: 230° for 30 seconds
(260° for 7 seconds)
- * Contact Material: Phosphor bronze
- * Housing: NL-9T (UL 94 V-0)

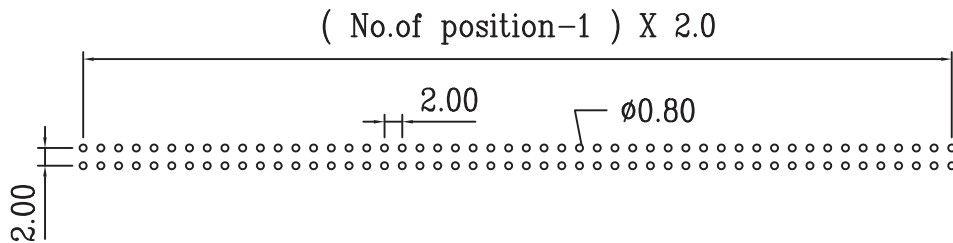

P.C.B.layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1:1

DATE


SIZE A4

X. ± 0.50
 .X ± 0.35
 .XX ± 0.25
 .XXX ± 0.05
 ANG ±

PPOJECTION



ORDER INFORMATION

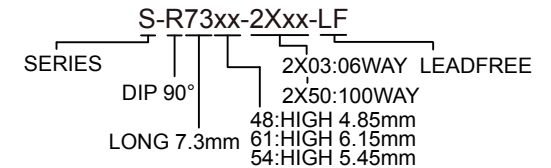

DESCRIPTION: 2.0mm Female Socket Right Angle type