


Specifications
 Current Rating:3Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:600VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 Nylon 6T(無鹵) or the equivalent material

Recommended P.C.Board Layout
 (Tolerance:±0.05)

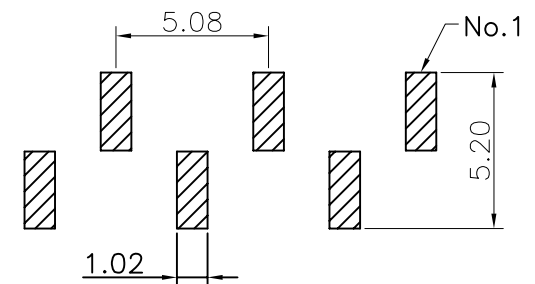

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ± 0.30
 X, ± 0.25
 .XX ± 0.15
 .XXX ± 0.10
 ANG ±

PPOJECTION



ORDER INFORMATION

F-V75XC-1XxxL-LF
 SERIES | 180°SMT | HIGH 7.5mm | CAP | NON POST | LEADFREE | L TYPE FOOT | 1X03:03 WAY | 1X40:40 WAY

DESCRIPTION: 2.54 FEMALE HEADER SINGLE ROW SMT TYPE BASE 7.10H