

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300VAC

Contact Resistance: 20mΩ Max.


Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze

Insulator Material: High Temperature Thermoplastic,
UL 94V-0 Nylon or the equivalent material.

Recommended P.C.Board Layout

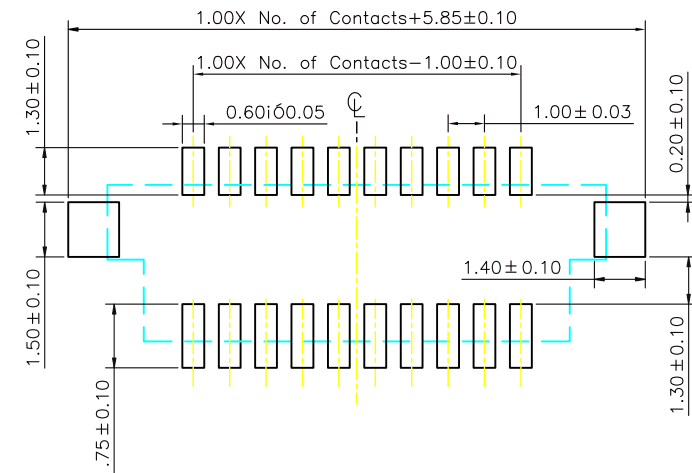

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1


DATE

SIZE A4

P PROJECTION

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

NP1014-PWT-xx-LF

SERIES | | | LEADFREE
| | | 10~30WAY
| | | TIN
| | | 90°SMT
| | | MALE

DESCRIPTION: 1.00Pitch ROWS BASE Board to Board MALE