


Specifications  
 Current Rating: 1.0Amp  
 Insulation Resistance: 1000MΩMin.  
 Dielectric Withstanding Voltage: 300VAC  
 Contact Resistance: 20mΩMax.  
 Operating Temperature: -40°C to +105°C  
 Materials  
 Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon 6T (Halogen Free) or the equivalent material

Recommended P.C.Board Layout  
 (Tolerance:  $\pm 0.05$ )

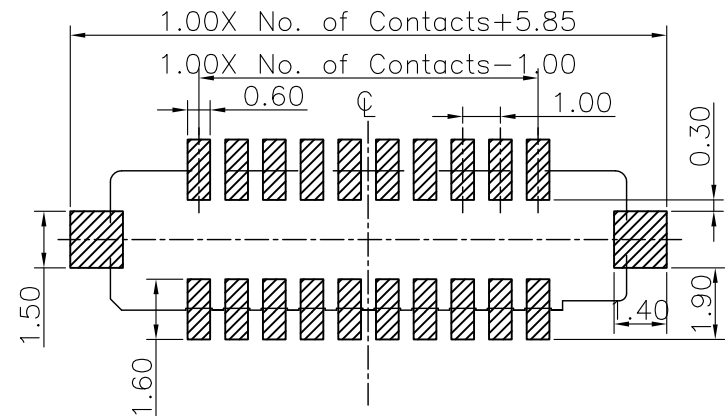

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1

DATE

SIZE A4

P PROJECTION

TOLERANCES ARE


X.  $\pm 0.30$

.X  $\pm 0.25$

.XX  $\pm 0.15$

.XXX  $\pm 0.10$

ANG  $\pm$



ORDER INFORMATION

NP1014-SVTC-xx-LF

SERIES

LEADFREE

06-30WAY

CAP (MYIAR)

TIN

180°SMT

FEMALE

DESCRIPTION: 1.00 PITCH FEMALE BOARD TO BOARD TYPE