

Recommended P.C.B Layout

MATERIAL

Insulator : 30% Glass fiber PBT
 Contact Pin : Brass, Gold Flash

SPECIFICATION

Current Rate : 3 AMP
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : AC 500V for one minute
 Operation Temperature : -40°C to + 105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY


CHECKED BY GENIUS

UNIT/ mm SCALE 1:1


DATE

SIZE A4 PROJECTION

X. ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ±



ORDER INFORMATION

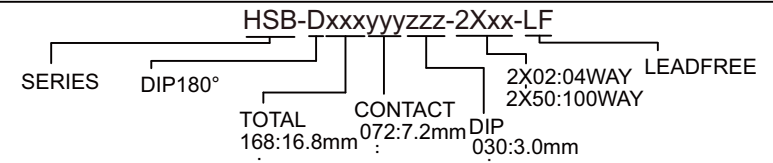

DESCRIPTION: PIN HEADER 2.54*2.54mm STRAIGHT STACK