


Recommend PCB Layout

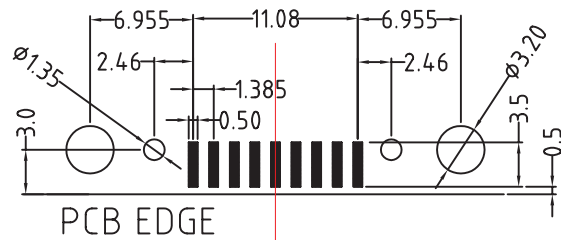

ELECTRICAL CHARACTERISTICS

Contact Current Rating:1Amperes.  
 Dielectric Withstanding Voltage:AC 500V at sea level.  
 Insulation Resistance:1000Megohms Min.  
 Contact Resistance:30Milliohms Max.  
 Operation Temperature : -55°C to +105°C.

Material

Contact :Copper Alloy.  
 Insulator:LCP. [Select PA6T /PA9T]  
 Shell: SPCC.  
 Z-Piece: Copper Alloy.

RoHS Compliant



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm SCALE 1:1


DATE

SIZE A4


TOLERANCES ARE

- X. ±
- .X ±
- .XX ±
- .XXX ±
- ANG ±

PJECTION



ORDER INFORMATION

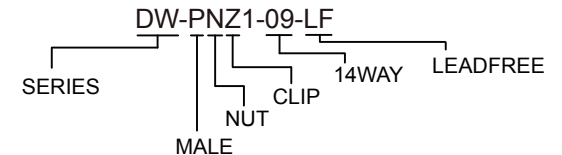

DESCRIPTION: