
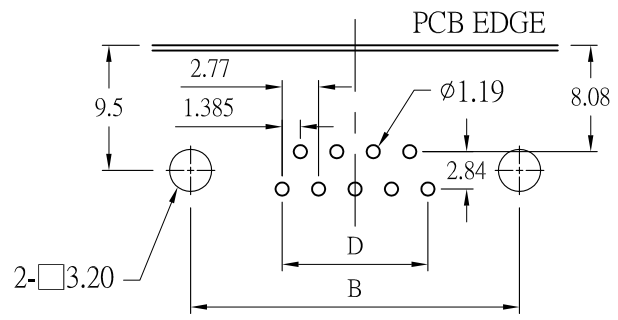


MATERIAL:

INSULATOR : PBT+30% GLASS FIBER (UL 94V-0),BLACK.
 CONTACT MATERIAL : BRASS.
 CONTACT FINISH : GOLD OVER NICKEL.
 SHELL FINISH : STEEL NICKEL PLATED.

SPECIFICATION:

CURRENT RATING : 5 AMP
 DIELECTRIC WITHSTANDING VOLTAGE : 1000V PER MINUTE.
 INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.
 CONTACT RESISTANCE : 15mΩ MAX. 10 SEC.
 OPERATING TEMPERATURE : -55°C ~ +105°C.

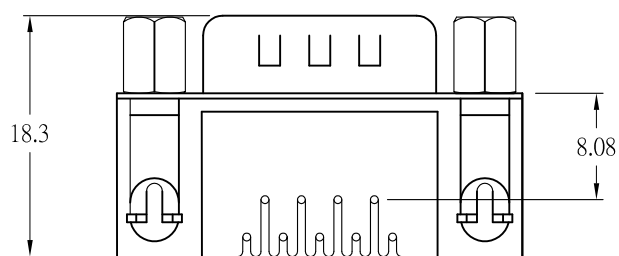

SHELL SIZE	Dim A ± 0.20	Dim B ± 0.25	Dim C ± 0.38	Dim D
09 pin	16.92	24.99	30.80	11.08
15 pin	25.25	33.32	39.10	19.39
25 pin	38.96	47.04	53.00	33.24
37 pin	55.42	63.50	69.32	49.86

RoHS Compliant

TOLERANCES ARE



DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±


DATE

.XXX ±


SIZE A4

PPOJECTION

ANG ±



ORDER INFORMATION



煜倫股份有限公司

www.morethanall.com

DESCRIPTION: D-SUB CONN. RIGHT ANGLE , MALE FOOTPRINT : 8.08mm